




1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZC.Wu	06.05.2014	David					



SPECIFICATIONS	
Part's Number	JIM2400T2500VM10
Frequency(GHz)	2.400~2.500
Direction	
Insertion Loss(dB)MAX	0.28
Isolation(dB)MIN	22.0
Return Loss(dB)MIN	22.0
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	70/70/-
Operating Temperature(°C)	-20~+85
Storage Temperature(°C)	-55~+125
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	100/-
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-

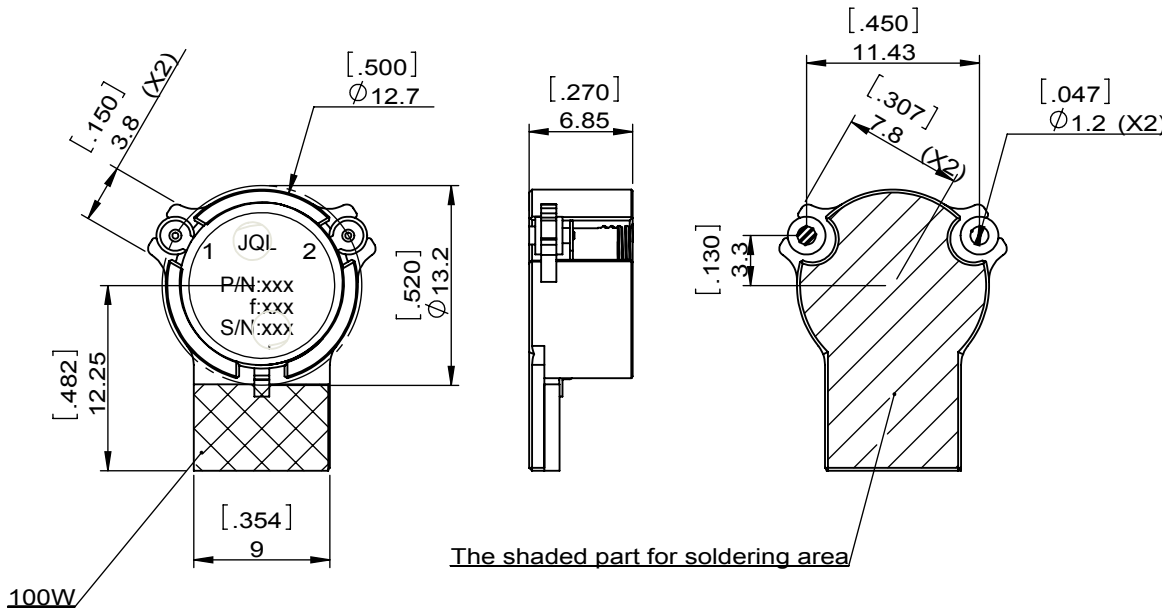

JQL Electronic Inc				
MATERIAL:	DWG NO: JIM2400T2500VM10			
	SURFACE TREATMENT: NICKLE PLATING			
DESCRIPTION: SMT ISOLATOR	DWG BY:	ZC.Wu	06.05.2014	SACLE
	CHK'D BY:			
	APPV'D BY:			2:1
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:		A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.