

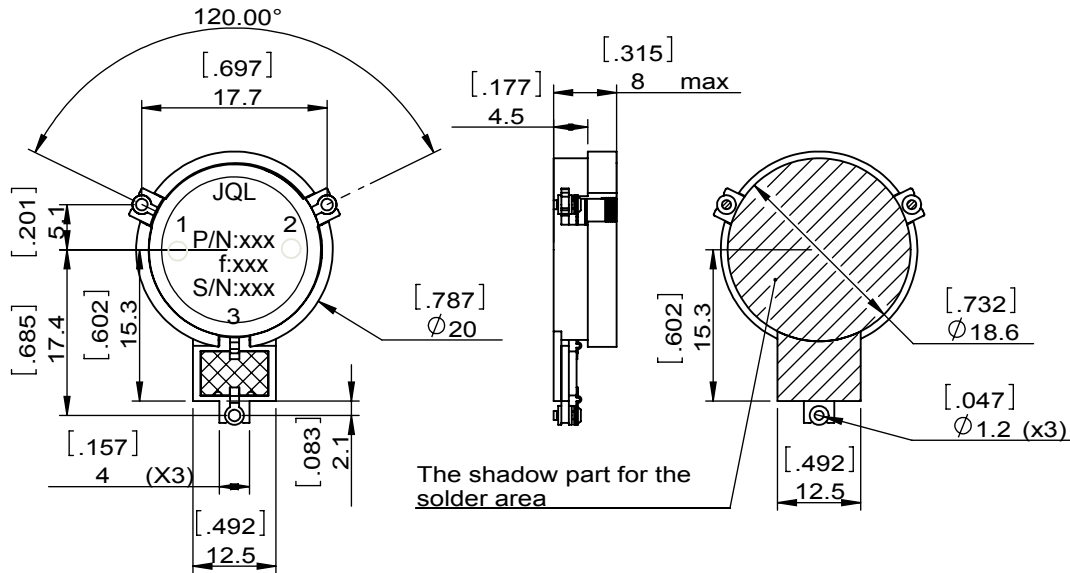


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZC.Wu	06.12.2014	David					



SPECIFICATIONS	
Part's Number	JIM3300T3400PM7A3
Frequency(GHz)	3.3~3.4
Direction	CW
Insertion Loss(dB)MAX	0.25; 0.20 typical
Isolation(dB)MIN	23
Return Loss(dB)MIN	21
3rd IMD(dBc)MAX	-70@2X25W CW tones, 1MHz spacing
Power FWD/REV/PK(Watt)	100/70/500
Operating Temperature(°C)	-40~+90
Storage Temperature(°C)	-55~+125
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-/29min, 31max
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	50Ω

JQL JQL Electronic Inc				
MATERIAL: STEEL		DWG NO: JIM3300T3400PM7A3		
SURFACE TREATMENT: NICKLE PLATING		DWG BY:	ZC.Wu	06.12.2014
DESCRIPTION: SMT ISOLATOR		CHK'D BY:		SACLE
		APPV'D BY:		1:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.