Document No.	QR4-700-T-003
REV.	A/0

REV.	DESCRIPTION	REVISOR	DATE	APPROVED
0		LJ.Zhang	06.24.2015	David

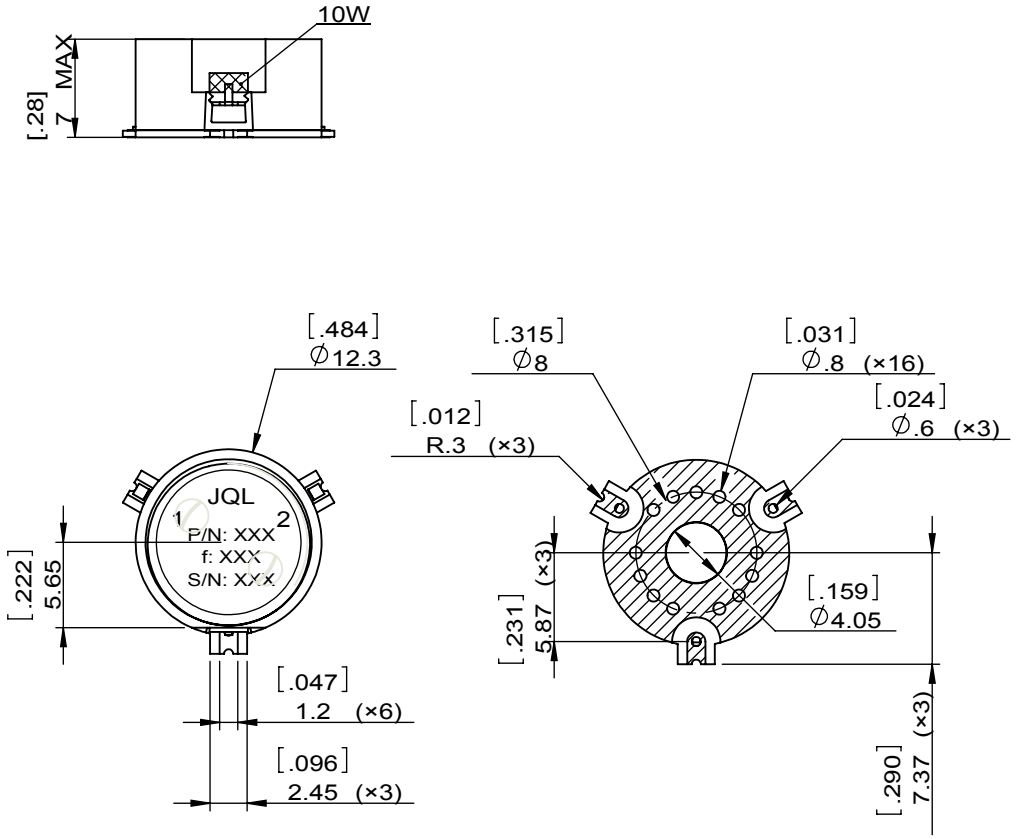

SPECIFICATIONS	
Part's Number	JIM7200T7800VM0R
Frequency(GHz)	7.200~7.800
Direction	CW
Insertion Loss(dB)MAX	0.30 @25°C 0.35 @-40 ~ +60°C
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	21.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	10/3/-
Operating Temperature(°C)	-40~+60
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	10/-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

JQL Electronic Inc

MATERIAL: STEEL	**DWG NO:** JIM7200T7800VM0R			
SURFACE TREATMENT: SILVER PLATING	DWG BY:	LJ.Zhang	06.24.2015	SCALE
	CHK'D BY:			2:1
DESCRIPTION: SMT ISOLATOR	APPV'D BY:			
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4

RoHS COMPLIANCE

This document is the property of JQL Electronic Inc.
It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

WEIGHT:

SHEET 1 OF 1