
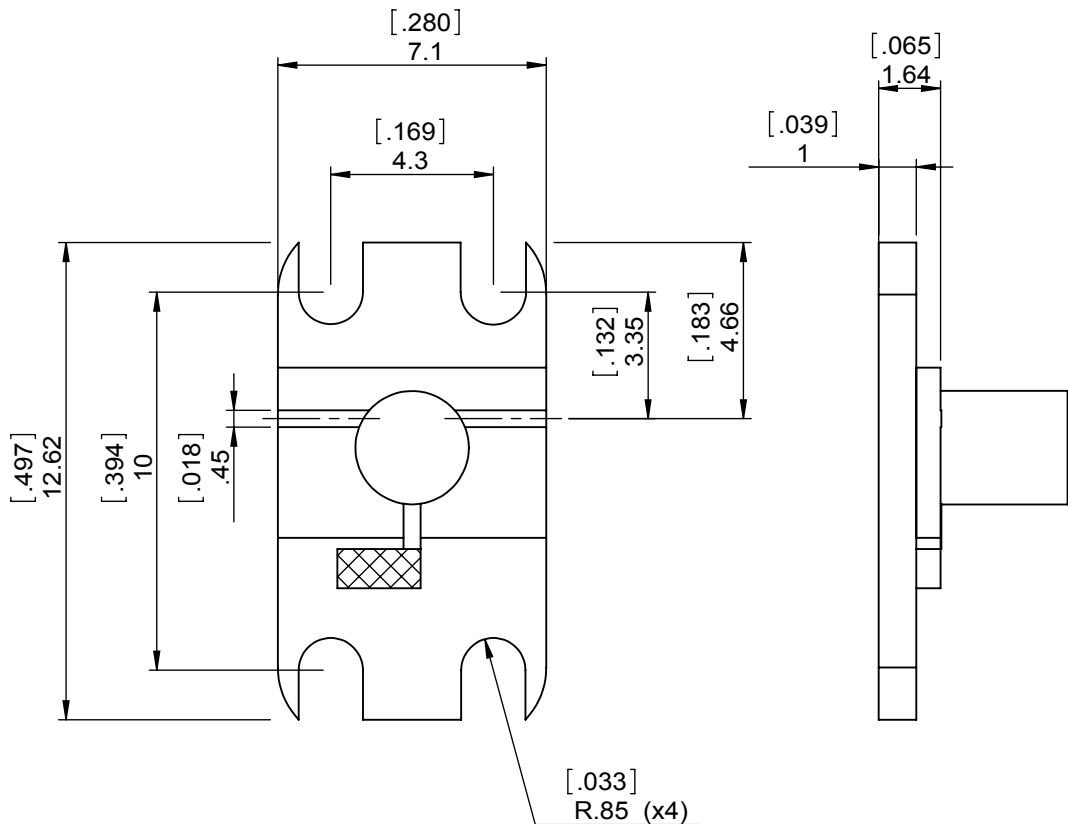
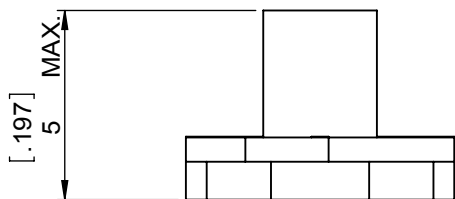


1		2		3		4		5		6	
Document No. QR4-700-T-003		REV. A/0		REV. 0		DESCRIPTION		REVISOR M.Hao		DATE 11.15.2013	
										APPROVED David	

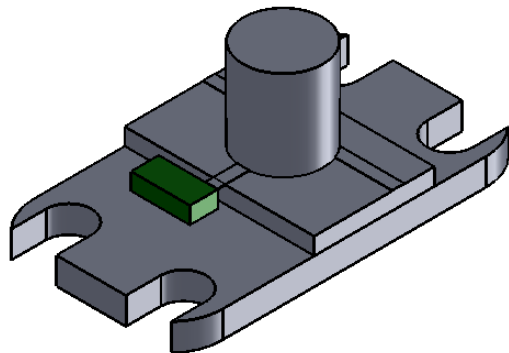

SPECIFICATIONS	
Part's Number	JIS10K1T11K0G2R
Frequency(GHz)	10.10~11.00
Direction	CW
Insertion Loss(dB)MAX	0.50@+25°C 0.50@-40°C~-85°C
Isolation(dB)MIN	20.0@+25°C 18.0@-40°C~-85°C
Return Loss(dB)MIN	19.0@+25°C 18.0@-40°C~-85°C
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	20/20/40
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

JQL JQL Electronic Inc 500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA Tel: 1(888)236-9828 Fax: 1(888)823-2902

MATERIAL: -	DWG NO: JIS10K1T11K0G2R			
SURFACE TREATMENT: -	DWG BY: M.Hao	11.15.2013	SACLE	
DESCRIPTION: MICROSTRIP ISOLATOR	CHK'D BY:		5:1	
	APPV'D BY:		The First:	
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	A4	



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.