


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZC.Wu	09.22.2015	David					



SPECIFICATIONS	
Part's Number	JIS24K5T28K4G0
Frequency(GHz)	24.500~28.3500
Direction	
Insertion Loss(dB)MAX	1.2
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	15.6
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	0.5/0.5/-
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	0.5
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	CONNECTOR TYPE:GWB

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b> -		<b>DWG NO:</b> JIS24K5T28K4G0		
<b>SURFACE TREATMENT:</b> -		DWG BY:	ZC.Wu	09.22.2015
<b>DESCRIPTION:</b> MICROSTRIP ISOLATEOR		CHK'D BY:		SCALE
		APPV'D BY:		8:1
Unit:	Tolerance:	The First:		A4
mm[inch]	Liner: ±0.25 Anguar: ±0.5°			

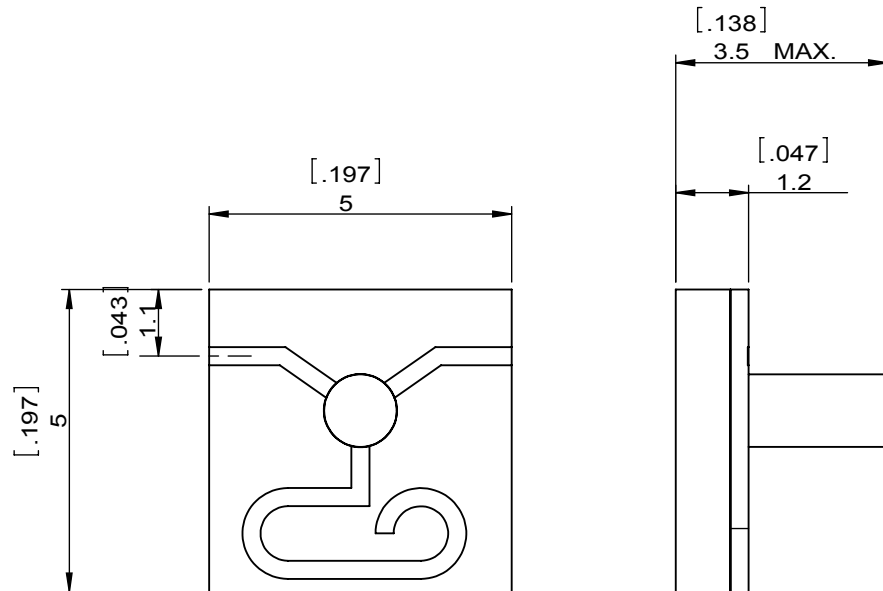

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.