


| | |
|--------------|---------------|
| Document No. | QR4-700-T-003 |
| REV. | A/0 |

| REV. | DESCRIPTION | REVISER | DATE | APPROVED |
|------|-------------|---------|------------|----------|
| 0 | | JP.Yang | 05.30.2013 | David |

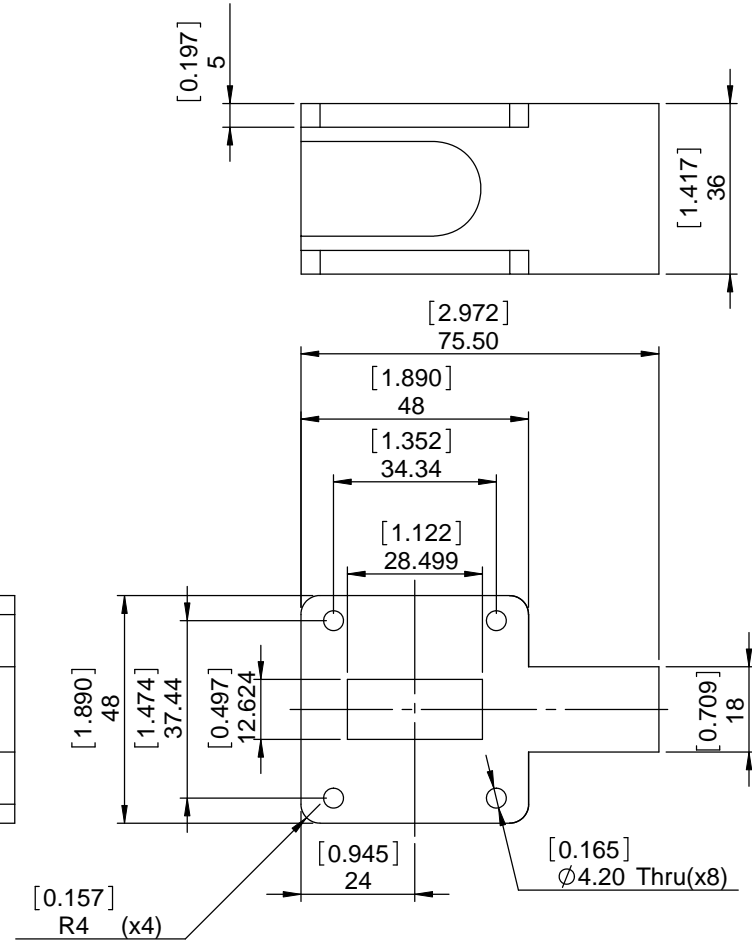

SPECIFICATIONS

P/N: JIWR112-36A-7125T8500
 FREQ: 7.125~8.500GHZ

ISOLATION: 20dB MIN
 INS LOSS: 0.4dB MAX
 VSWR: 1.25:1 MAX
 PWR: 15W
 WAVEGUIDE: WR112
 TEMP: -30c~+75c

JQL JQL Electronic Inc 500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA Tel: 1(888)236-9828 Fax: 1(888)823-2902

| | | | | |
|--|-------------------------------------|--------------------------------|------------|-------|
| MATERIAL: | DWG NO JIWR112-36A-7125T8500 | | | |
| SURFACE TREATMENT: BLACK PAINT | DWG BY: | JP.Yang | 05.30.2013 | SACLE |
| | CHK'D BY: | | | |
| DESCRIPTION: | APPV'D BY: | | | 2:3 |
| | Unit: | Tolerance: | The First: | A4 |
| | mm[inch] | Liner: ±0.1mm Anguar: ±0.5° | | |



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.