

K Band Waveguide Isolator

JIWR34-12.7A-26K2T26K7

Description:




JIWR34-12.7A-26K2T26K7 is a Waveguide isolator in the frequency 26.200~26.700GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.3dB and minimum return loss of 21.0dB. This circulator can handle a CW Power FWD/REV/PK(Watt) of 2/1/-

Electrical Specification

Part Number	JIWR34-12.7A-26K2T26K7
Frequency (GHz)	26.200~26.700
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	23.0
Return Loss(dB)MIN	21.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	2/1/-


Outline

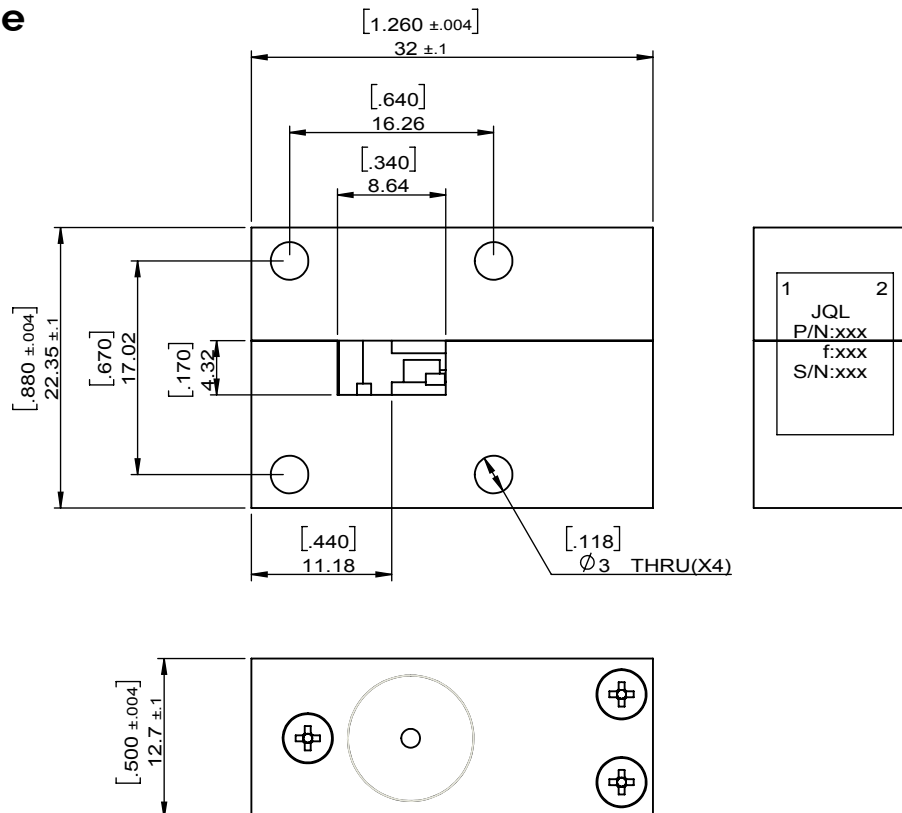

K Band Waveguide Isolator

JIWR34-12.7A-26K2T26K7

Test Data

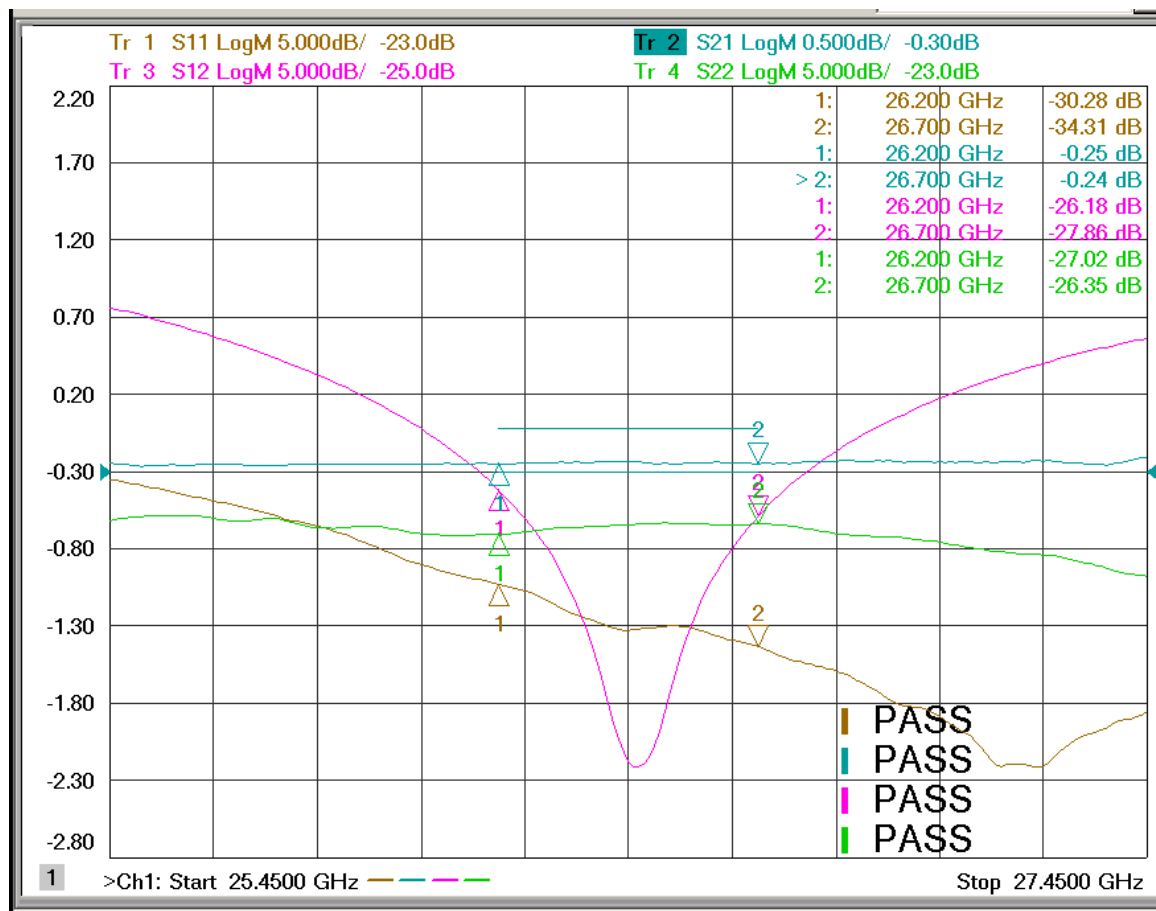

Applications

- SATCOM