

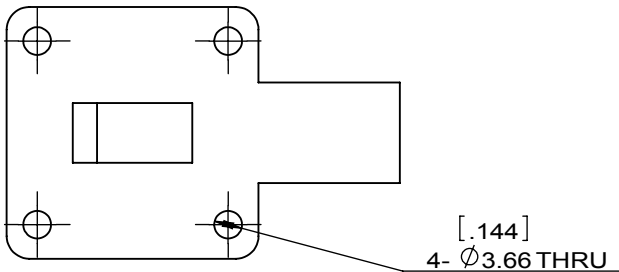


1		2		3		4		5		6	
Document No.		QR4-700-T-003		REV.		DESCRIPTION		REVISOR		DATE	
REV.		A/0		0				ZC.Wu		08.04.2014	
										APPROVED	
										David	

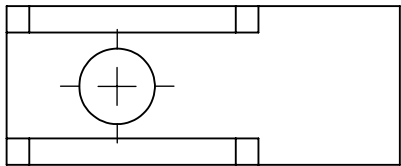

SPECIFICATIONS	
Part's Number	JIWR62-21-14K0T15K3
Frequency(GHz)	14.00~15.30
Direction	
Insertion Loss(dB)MAX	0.35
Isolation(dB)MIN	22.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	15/5/-
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-

JQL JQL Electronic Inc				
MATERIAL: Copper		DWG NO: JIWR62-21-14K0T15K3		
SURFACE TREATMENT: Silver plated		DWG BY:	ZC.Wu	08.04.2014
		CHK'D BY:		
DESCRIPTION: CUSTOM WAVEDUIDE ISOLATOR		APP'VD BY:		1:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

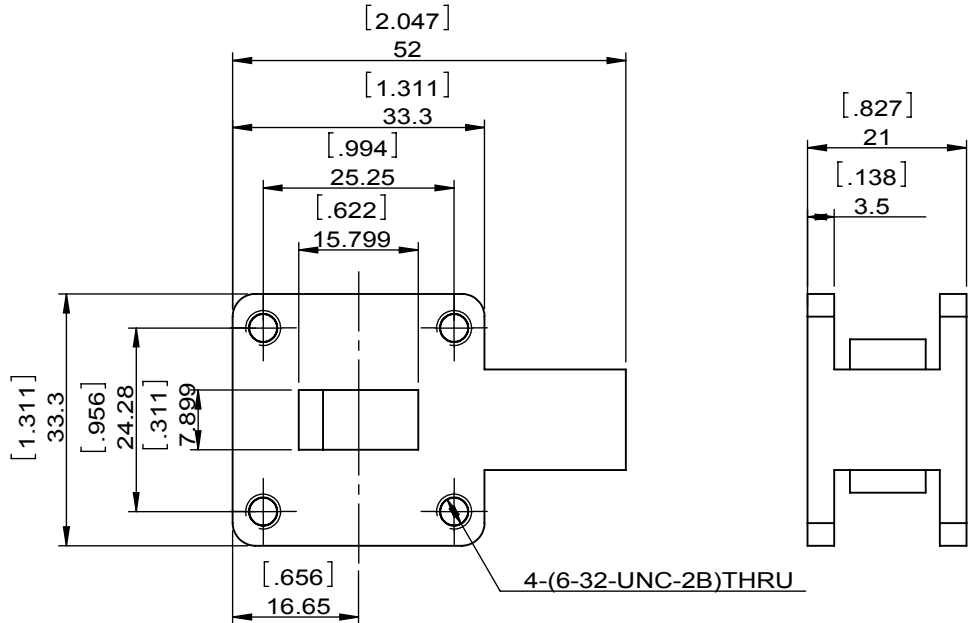

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.