



Document No.	QR4-700-T-003
REV.	A/0

REV.	DESCRIPTION	REVISOR	DATE	APPROVED
1		ZC.Wu	08.26.2014	David

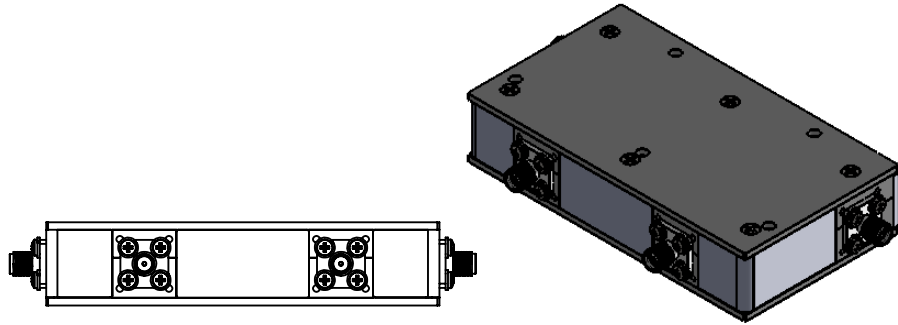

SPECIFICATIONS	
Part's Number	JC2C0400T0460S15
Frequency(GHz)	0.400~0.460
Direction	-
Insertion Loss(dB)MAX	0.25 per junction
Isolation(dB)MIN	25.0 per junction
Return Loss(dB)MIN	21.0
3rd IMD(dBc)MAX	--
Power FWD/REV/PK(Watt)	150/-/-
Operating Temperature(°C)	-15~60
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	Securing the Screws By Epoxy

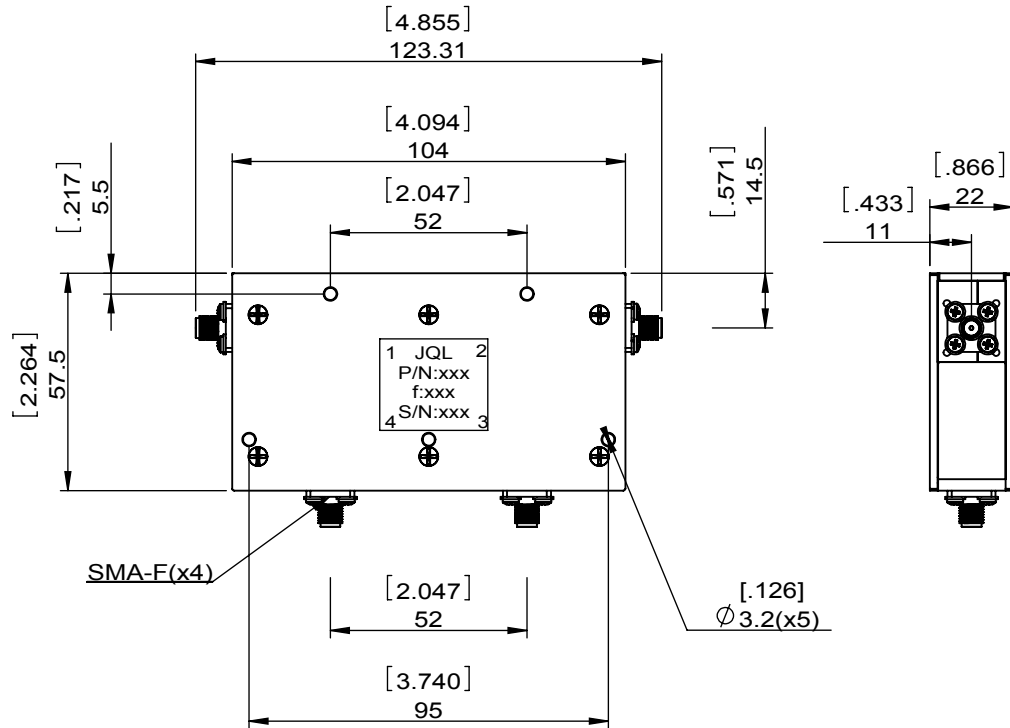

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL	JQL Electronic Inc	500 Lake Cook Road, Suite 350		Tel: 1(888)236-9828
		Deerfield, IL 60015, USA		Fax: 1(888)823-2902

MATERIAL: STEEL	DWG NO: JC2C0400T0460S15			
	SURFACE TREATMENT: NICKEL PLATING		DWG BY:	ZC.Wu
DESCRIPTION: DUAL COAXIAL CIRCULATOR	CHK'D BY:		04.30.2014	SACLE
	APPV'D BY:		1:2	
	Unit:	Tolerance:		
mm[inch]	Liner: ±0.25 Anguar: ±0.5°			
				A4