



1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISOR	DATE	APPROVED	
REV.	A/0					0		ZC.Wu	12.22.2014	David	

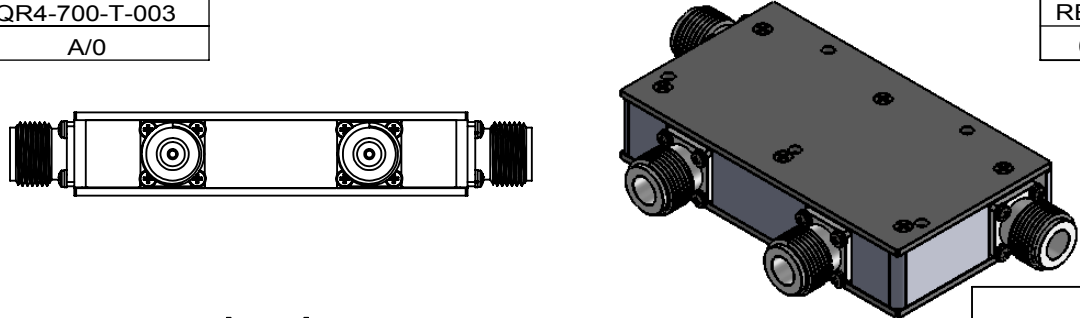

SPECIFICATIONS	
Part's Number	JC2C0430T0460N10
Frequency(GHz)	0.430~0.460
Direction	-
Insertion Loss(dB)MAX	0.35 PER JUNCTION
Isolation(dB)MIN	22.0 PER JUNCTION
Return Loss(dB)MIN	19.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	100/100/-
Operating Temperature(°C)	-30~+60
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

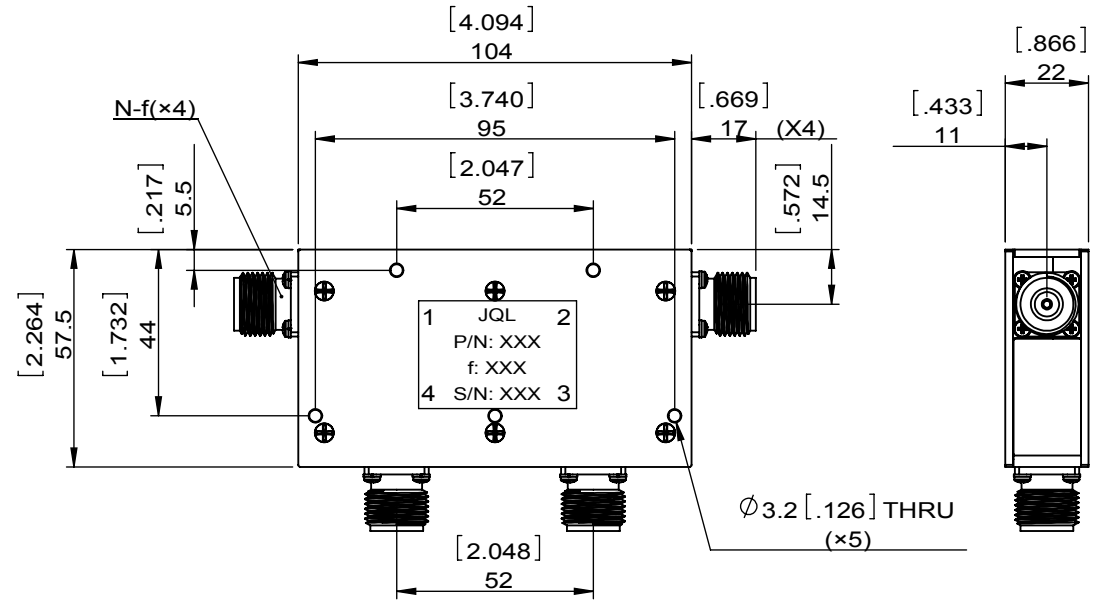

**JQL** JQL Electronic Inc

<b>MATERIAL:</b> STEEL	<b>DWG NO:</b> JC2C0430T0460N10
<b>SURFACE TREATMENT:</b> NICKEL PLATING	DWG BY: ZC.Wu 12.22.2014 SCALE
<b>DESCRIPTION:</b> DUAL COAXIAL CIRCULATOR	CHK'D BY:
	APPV'D BY:
	Unit: mm[inch] Tolerance: Liner: ±0.25 Anguar: ±0.5°
The First:	
1:2 A4	



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.