



1	2	3	4	5	6			
Document No.	QR4-700-T-003			REV.	DESCRIPTION	REVISOR	DATE	APPROVED
REV.	A/0			0		ZC.Wu	07.02.2014	David

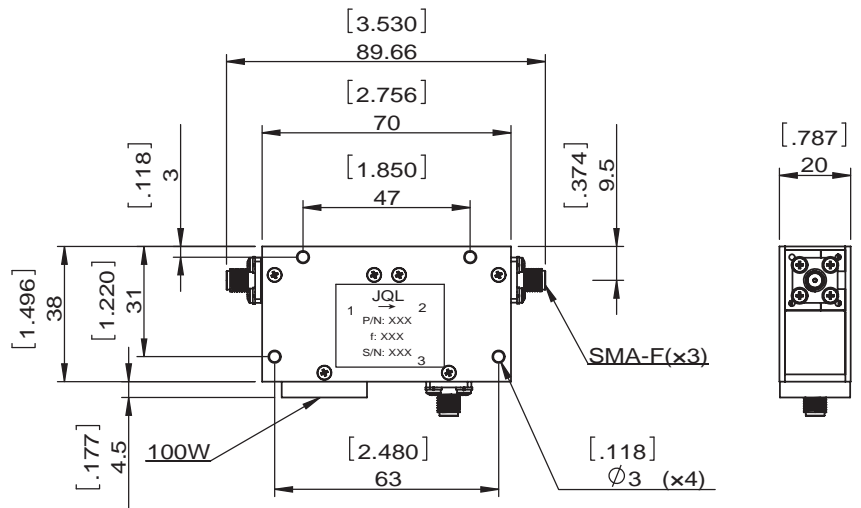

SPECIFICATIONS	
Part's Number	JC2C0700T0800S1
Frequency(GHz)	0.700~0.800
Direction	CW
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	40.0
Return Loss(dB)MIN	22.0
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	100/10/-
Operating Temperature(°C)	-30~+75
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	100/-
Tab(WxLGxTHK)(mm[Inch])	
Additional Notes	

JQL JQL Electronic Inc			
MATERIAL: STEEL		DWG NO: JC2C0700T0800S1	
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	ZC.Wu
DESCRIPTION: DUAL COAXIAL CIRCULATOR		CHK'D BY:	
		APPV'D BY:	
Unit: mm[inch]		Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
			SCALE 1:2 A4

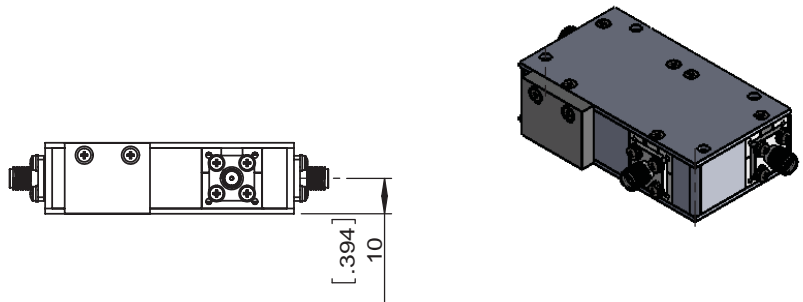

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.