
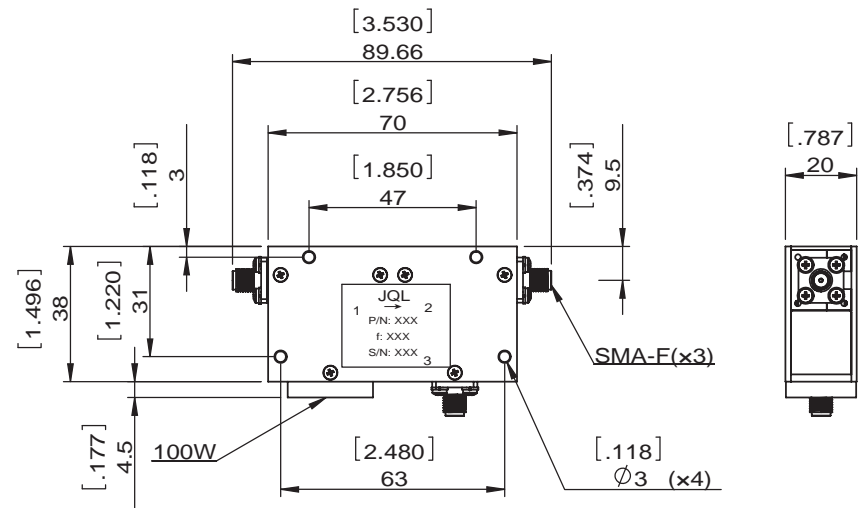


1	2	3	4	5	6			
Document No.	QR4-700-T-003			REV.	DESCRIPTION	REVISOR	DATE	APPROVED
REV.	A/0			0		ZC.Wu	07.02.2014	David

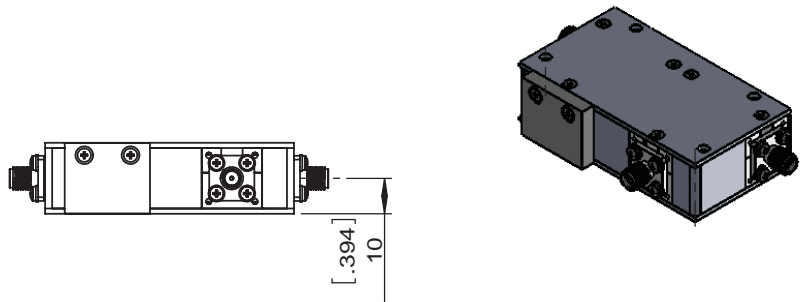

SPECIFICATIONS	
Part's Number	JC2C0960T1215S10
Frequency(GHz)	0.960~1.215
Direction	CW
Insertion Loss(dB)MAX	0.8
Isolation(dB)MIN	38.0
Return Loss(dB)MIN	18.0
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	100/100/-
Operating Temperature(°C)	-30~+70
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	100/-
Tab(WxLGxTHK)(mm[Inch])	
Additional Notes	

JQL JQL Electronic Inc

MATERIAL: STEEL

DWG NO: JC2C0960T1215S10

SURFACE TREATMENT: NICKEL PLATING

DWG BY:	ZC.Wu	07.02.2014	SCALE
CHK'D BY:			
APPV'D BY:			1:2
Unit:	Tolerance:	The First:	
mm[inch]	Liner: ±0.25	Angular: ±0.5°	A4

DESCRIPTION: DUAL COAXIAL CIRCULATOR

RoHS COMPLIANCE

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.