



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		ZC.Wu	07.14.2014	David			

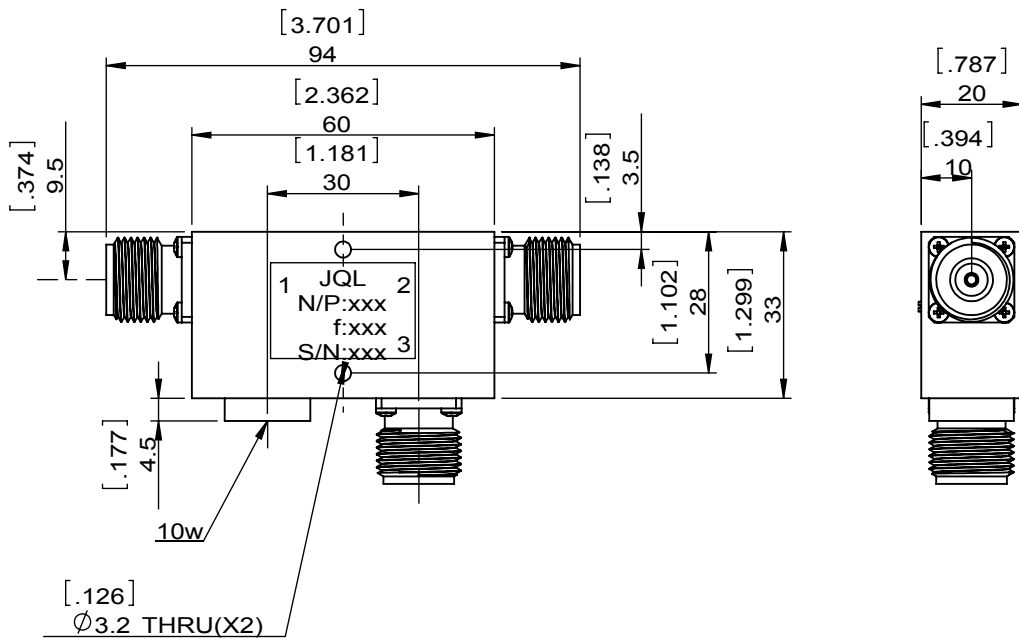

SPECIFICATIONS	
Part's Number	JC2C2055T2225T1N20
Frequency(GHz)	2.025~2.225
Direction	
Insertion Loss(dB)MAX	0.45 PER
Isolation(dB)MIN	45
Return Loss(dB)MIN	21
3rd IMD(dBc)MAX	-70
Power FWD/REV/PK(Watt)	200/150/-
Operating Temperature(°C)	-30~+80
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	10W
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-

JQL JQL Electronic Inc				
MATERIAL: STEEL		DWG NO: JC2C2055T2225T1N20		
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	ZC.Wu	07.14.2014
DESCRIPTION: DUAL COAXIAL CIRCULATOR		CHK'D BY:		SCALE
		APP'V'D BY:		2:3
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

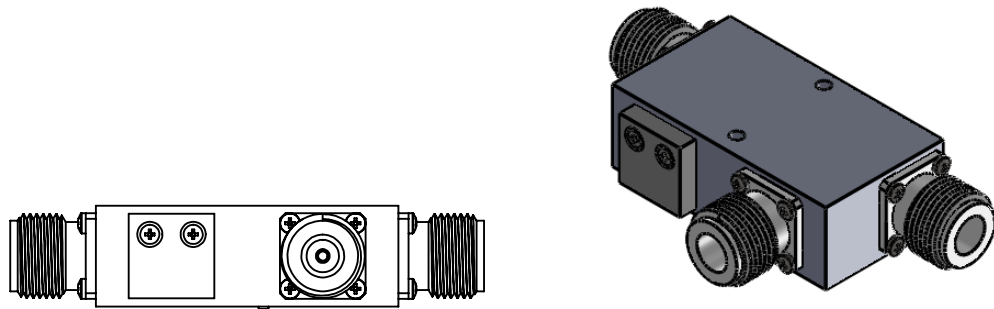

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.