


C Band Dual Coaxial Circulator

JC2C5400T5900N30P

Description:

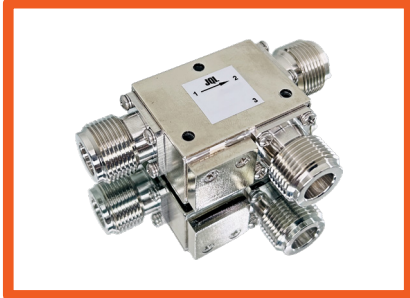


JC2C5400T5900N30P is a dual coaxial circulator in the frequency 5.400~5.900GHz. The device is extremely stable over the temperature range of 35°C~+75°C, with maximum insertion loss of P1→p2:0.50 || P2→p3:0.25 and minimum return loss of 21.0 dB. It can handle a CW Power FWD/REV/PK(Watt) of 10/10/-

Electrical Specification

Part Number	JC2C5400T5900N30P
Frequency (GHz)	5.400~5.900
Insertion Loss(dB)MAX	P1→p2:0.50 P2→p3:0.25
Isolation(dB)MIN	P2→p1:50 P3→p2:23
Return Loss(dB)MIN	21.0
Operating Temperature	-35°C~+75°C
Power FWD/REV/PK(Watt)	60/10/300


Outline

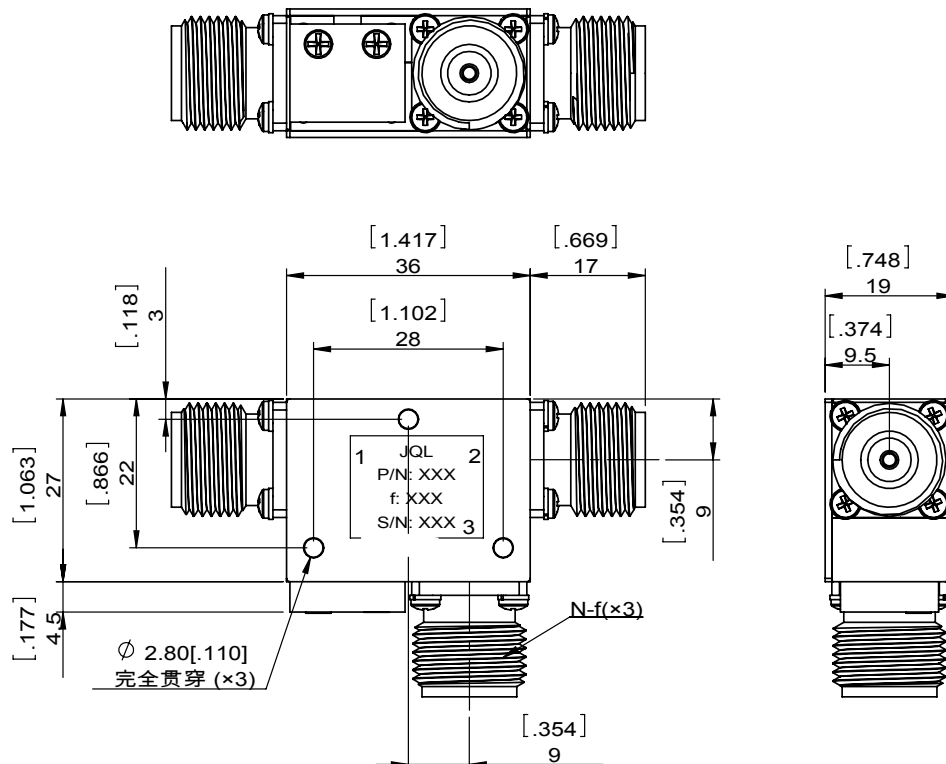

C Band Dual Coaxial Circulator

JC2C5400T5900N30P

Test Data

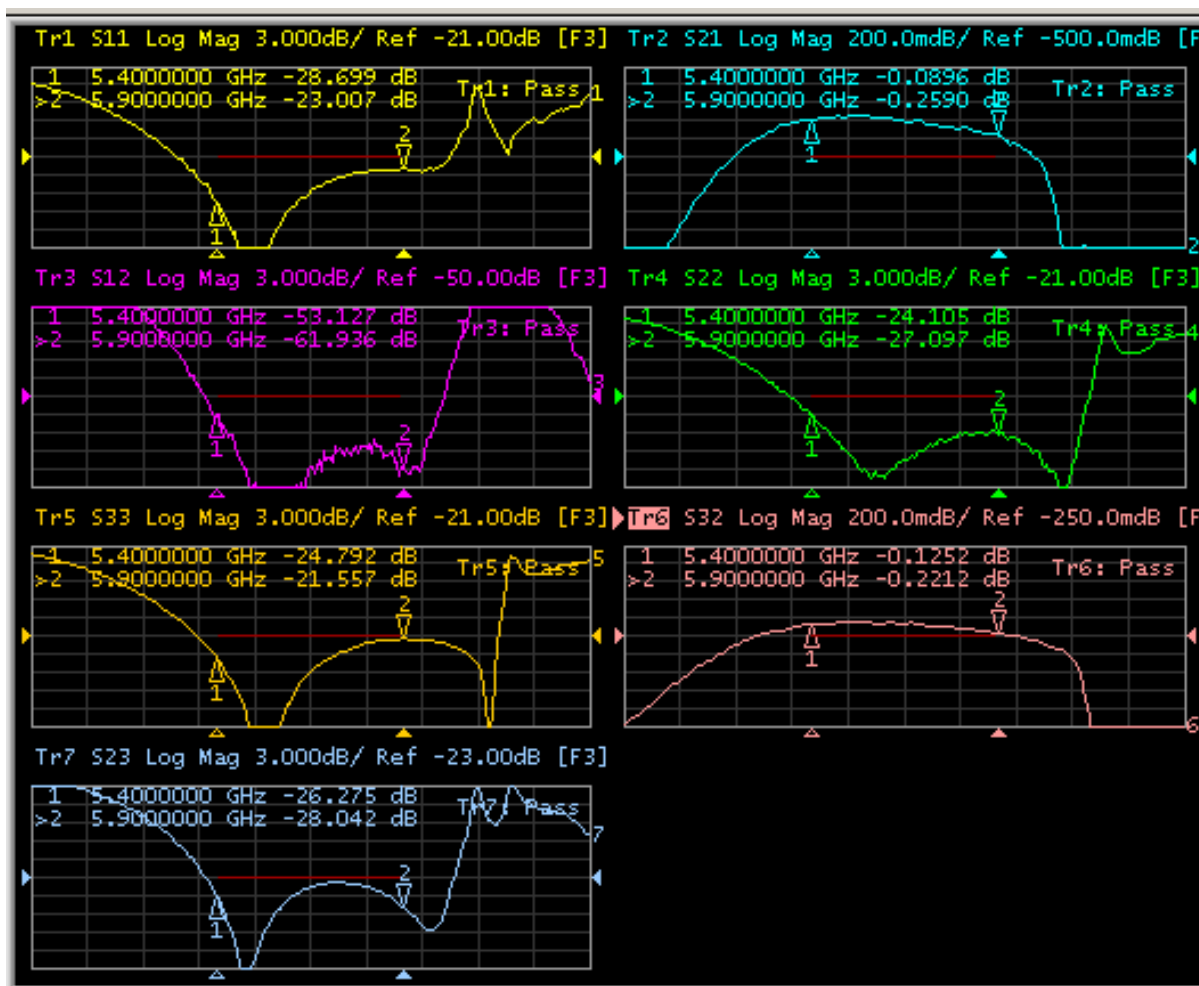

Applications

- Surveillance