


REV.	DESCRIPTION	REVISOR	DATE	APPROVE

SPECIFICATIONS

P/N: JCC0390T0450N20
 FREQ: 0.390~0.450GHz

ISOLATION: 20dB MIN
 INS LOSS: 0.4dB MAX
 VSWR: 1.25:1 MAX
 POWER: 200W AVG
 CIRCULATION: CLOCKWISE
 CONNECTOR: N-FEMALE
 TEMPERATURE OPERATING: -15C~+60C
 STORAGE: -55C~+125C

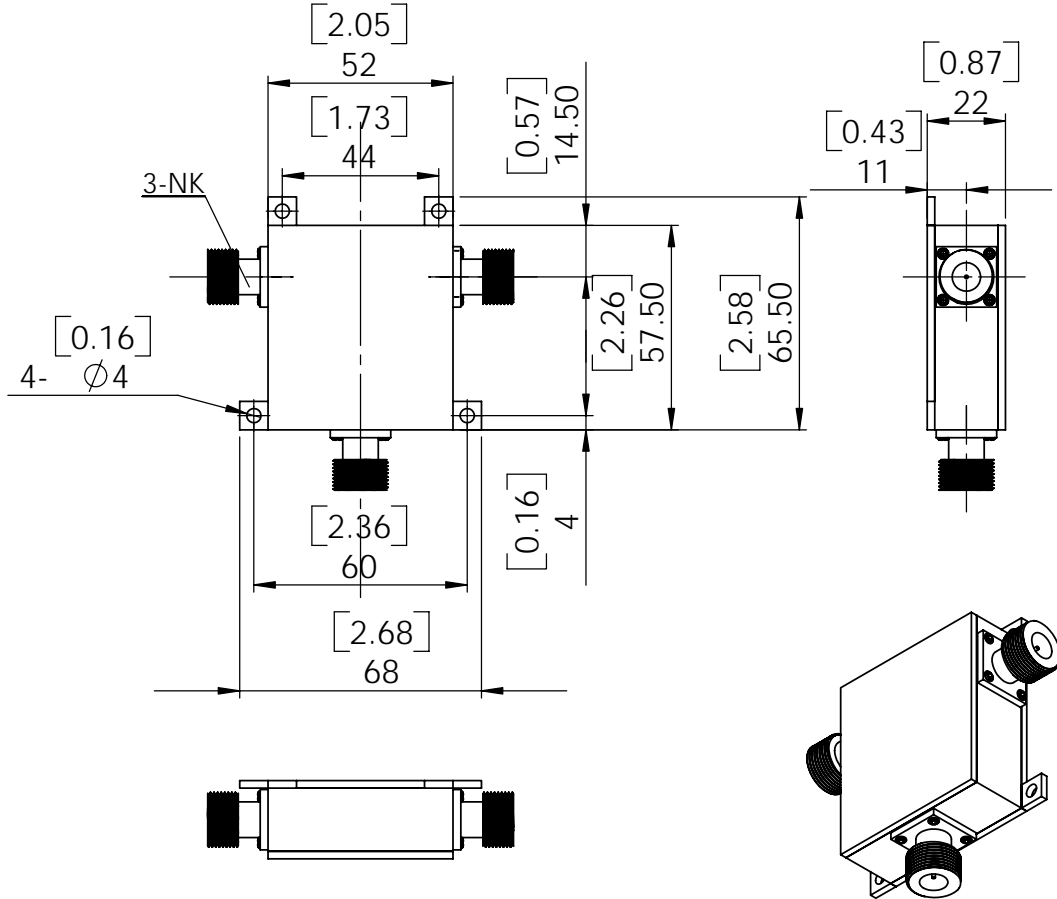

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

Connector Option: The data sheet shows the default connector as N-f, optional connectors includes N-m, SMA-f and SMA-m, please see the specifications for details.

JQL Electronic Inc 3501 Algonquin Road, Ste 230 Rolling Meadows, IL 60008, USA Tel : 1(888)236-9828 Fax: 1(630)823-2902																	
MATERIAL: STEEL Y15	DWG NO. JCC0390T0450N20																
SURFACE TREATMENT: NICKLE PLATING																	
DESCRIPTION: COAX CIRCULATOR																	
	<table border="1"> <tr> <th>NAME</th> <th>DATE</th> <th>SIGNATURE</th> <th>REV:</th> </tr> <tr> <td>DWG BY:</td> <td></td> <td></td> <td></td> </tr> <tr> <td>CHK'D BY:</td> <td></td> <td></td> <td></td> </tr> <tr> <td>APPV'D BY:</td> <td></td> <td></td> <td></td> </tr> </table>	NAME	DATE	SIGNATURE	REV:	DWG BY:				CHK'D BY:				APPV'D BY:			
NAME	DATE	SIGNATURE	REV:														
DWG BY:																	
CHK'D BY:																	
APPV'D BY:																	
	<table border="1"> <tr> <td>TOLERANCE</td> <td>Q.A</td> </tr> <tr> <td>Liner: ±0.1mm</td> <td></td> </tr> <tr> <td>Angular: ±0.5°</td> <td></td> </tr> </table>	TOLERANCE	Q.A	Liner: ±0.1mm		Angular: ±0.5°											
TOLERANCE	Q.A																
Liner: ±0.1mm																	
Angular: ±0.5°																	