



5		6		
REV.	DESCRIPTION	REVISOR	DATE	APPROVE
0		MH	04.18.12	CH

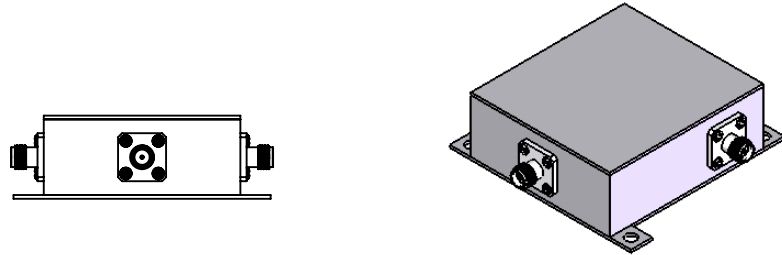

SPECIFICATION

Part's Number: JCC0400T0450S10
 Frequency: 0.400~0.450GHz
 Direction: CW
 Insertion Loss: 0.30dB MAX.
 Isolation: 20dB MIN.
 VSWR: 1.25:1 MAX.
 POWER: 100W AVG
 Connector: SMA-F
 Temperature:
 Operating: -20°C~+70°C
 Storage: -55°C~+125°C

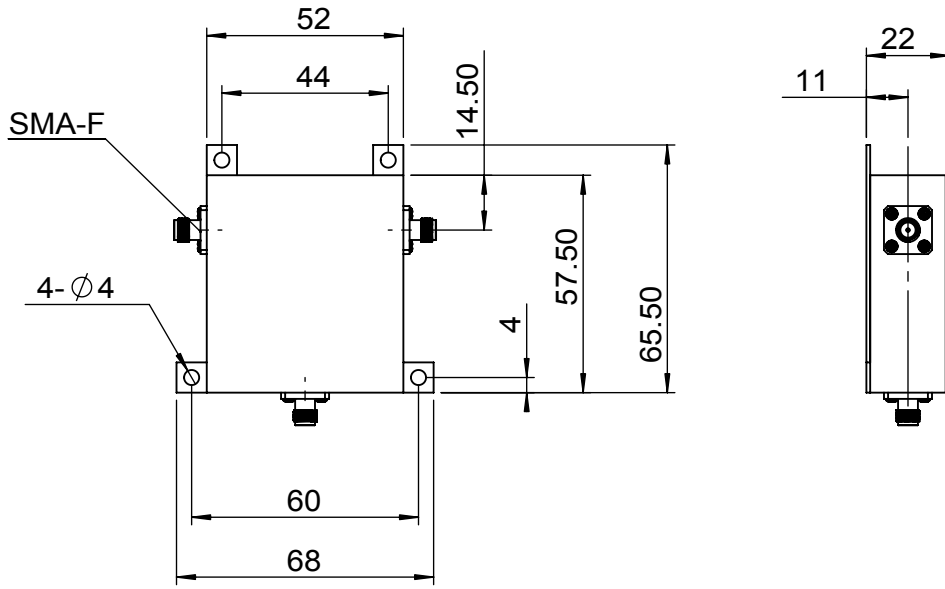

This document is the property of JQL Electronic Inc.
 It cannot be copied, duplicated, used for manufacturing purposes
 or communicated to third party as a whole or partly,
 without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc		500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA		Tel : 1(888)236-9828 Fax: 1(630)823-2902	
MATERIAL: STEEL		DWG NO. JCC0400T0450S10			
SURFACE TREATMENT: NICKEL PLATING		NAME		DATE	
DESCRIPTION: COAX CIRCULAOR		DWG BY: MH		04.18.12	
		CHK'D BY: FW		04.18.12	
		APPV'D BY: CH		04.18.12	
Unit: mm		TOLERANCE: Liner: ±0.1mm Angular: ±0.5°		Type Of Projection 	
				SCALE: 1:1	
				A4	

WEIGHT: