



1		2		3		4		5		6	
Document No. QR4-700-T-003								REV.		DESCRIPTION	
REV. A/0								0		ZC.Wu	
								12.04.2015		APPROVED David	

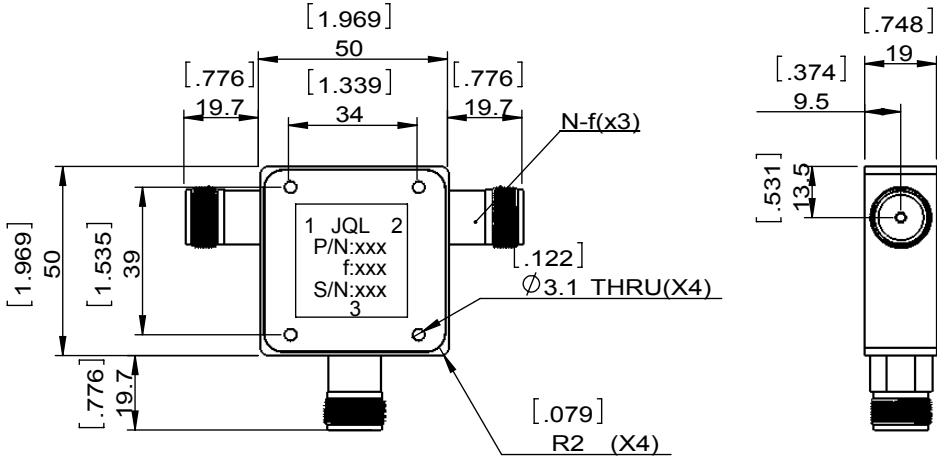

SPECIFICATIONS	
Part's Number	JCC0698T0806N20
Frequency(GHz)	0.698~0.806
Direction	CW
Insertion Loss(dB)MAX	0.28
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-75@2X43dBm, spacing 5MHz
Power FWD/REV/PK(Watt)	200/200/-
Operating Temperature(°C)	-10~+60
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

JQL JQL Electronic Inc				
MATERIAL: STEEL		DWG NO: JCC0698T0806N20		
SURFACE TREATMENT: SILVER PLATING		DWG BY:	ZC.Wu	12.04.2015
DESCRIPTION: COAXIAL CIRCULATOR		CHK'D BY:		SCALE
		APPV'D BY:		1:2
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.