
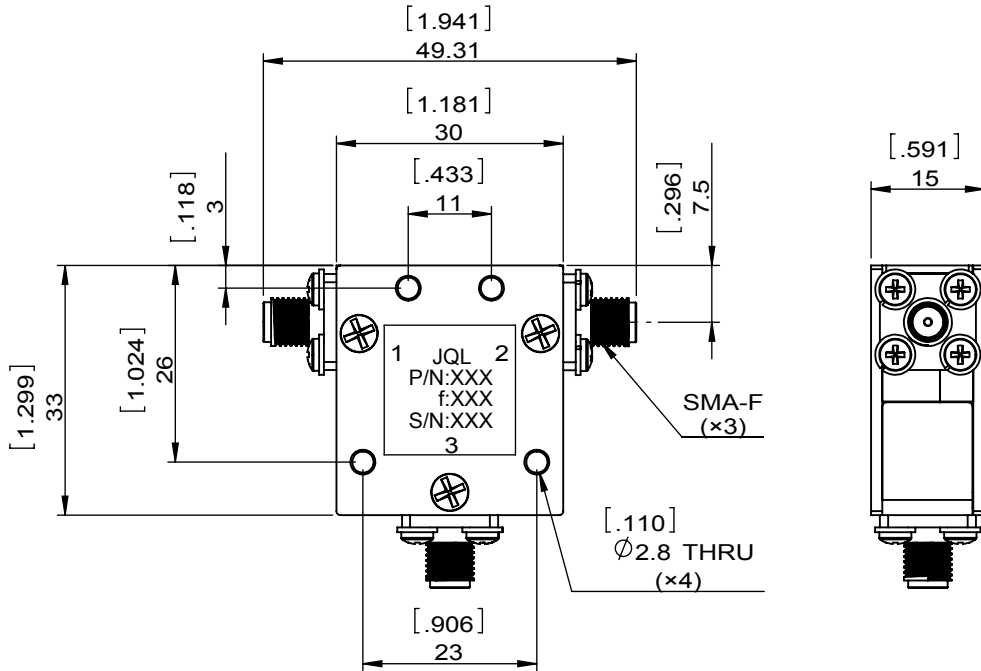


1	2
Document No.	QR4-700-T-003
REV.	A/0

3	4	5	6
REV.	DESCRIPTION	REVISOR	DATE
0		LJ.Zhang	06.07.2013
			APPROVED
			David

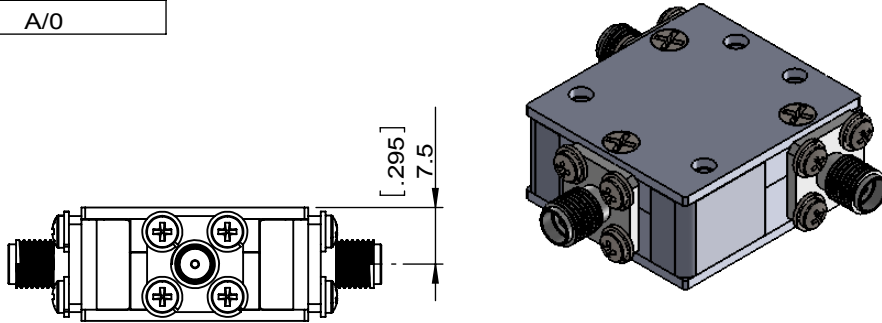

SPECIFICATIONS	
Part's Number	JCC0860T0960S15
Frequency(GHz)	0.860~0.960
Direction	CW
Insertion Loss(dB)MAX	0.40
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	19.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	150/150/-
Operating Temperature(°C)	-30~+70
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

JQL	JQL Electronic Inc	500 Lake Cook Road, Suite 350		Tel: 1(888)236-9828	
		Deerfield, IL 60015, USA		Fax: 1(888)823-2902	
MATERIAL: STEEL		DWG NO: JCC0860T0960S15			
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	LJ.Zhang	06.07.2013	SACLE
DESCRIPTION: COAXIAL CIRCULATOR		CHK'D BY:			
		APPV'D BY:			1:1
		Unit:	Tolerance:	The First:	A4
		mm[inch]	Liner: ±0.25 Anguar: ±0.5°		



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.