

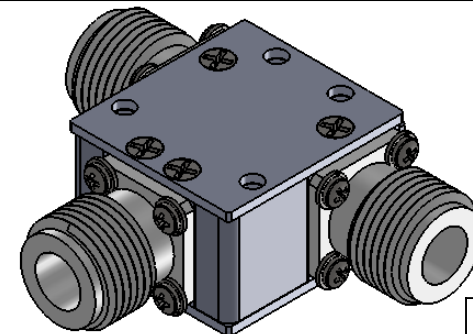


1	2
Document No.	QR4-700-T-003
REV.	A/0

4	5	6		
REV.	DESCRIPTION	REVISOR	DATE	APPROVED
0		CH	07.11.2014	David

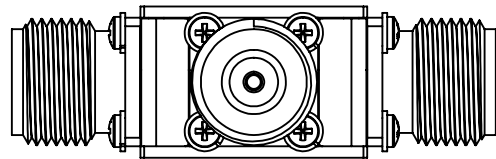

SPECIFICATIONS	
Part's Number	JCC1020T1040N1P
Frequency(GHz)	1.020~1.040
Direction	-
Insertion Loss(dB)MAX	0.25
Isolation(dB)MIN	21.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	20/20/1000
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

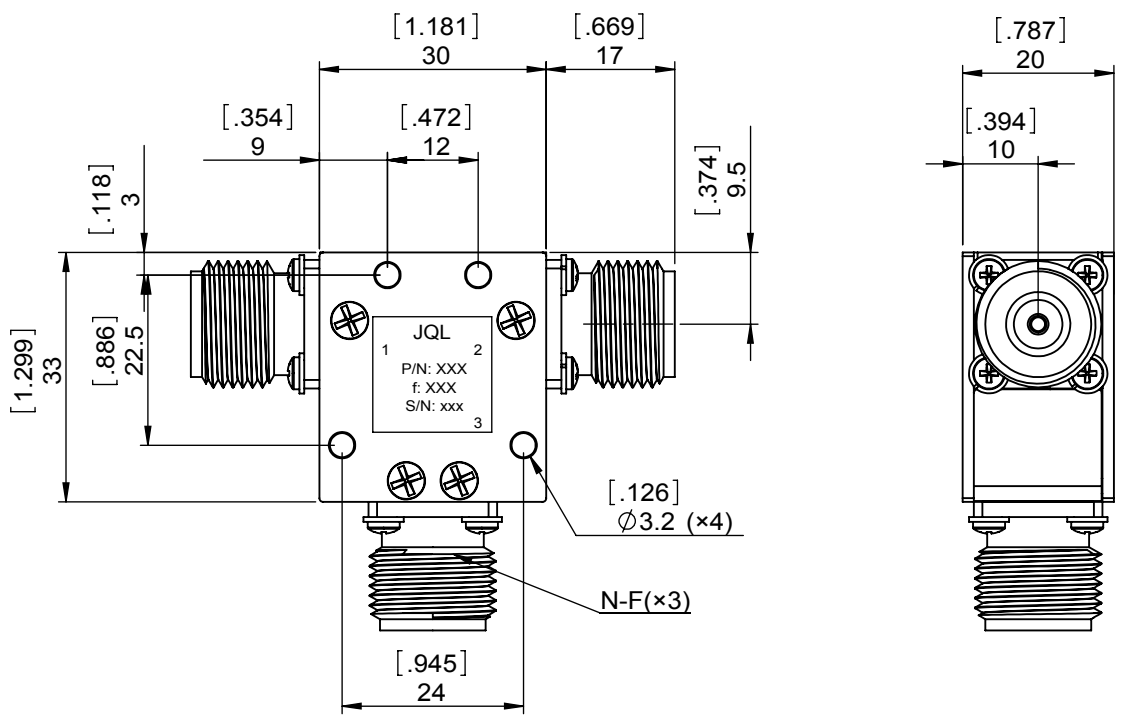

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc	
MATERIAL: STEEL	DWG NO: JCC1020T1040N1P
SURFACE TREATMENT: NICKEL PLATING	DWG BY: CH 07.11.2014 SCALE
DESCRIPTION: COAXIAL CIRCULATOR	CHK'D BY: APP'VD BY: 1:1
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5° The First:
	A4