
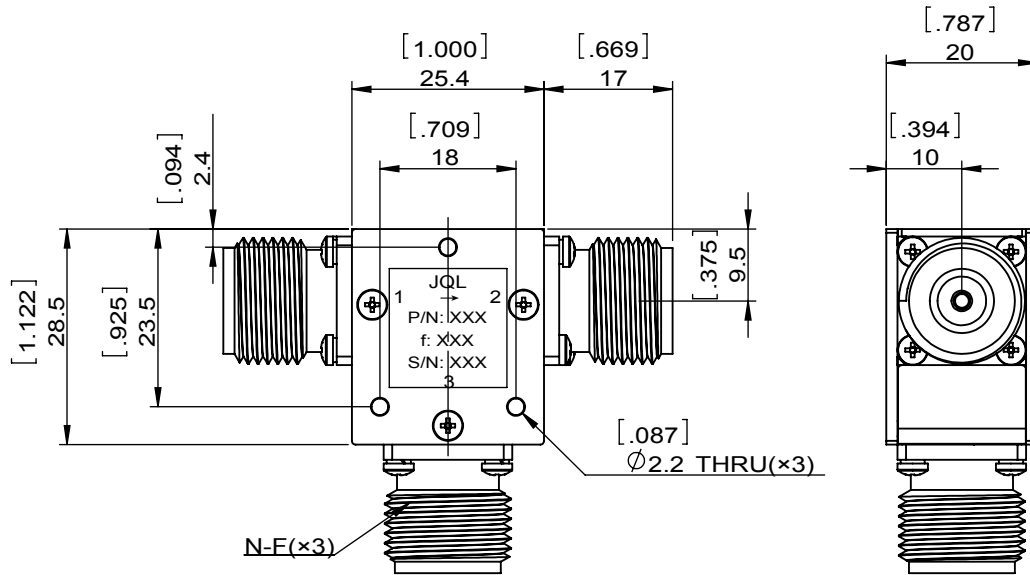
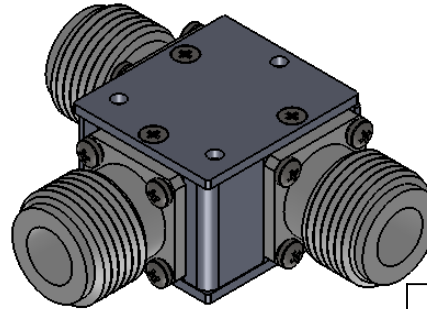


1	2
Document No.	QR4-700-T-003
REV.	A/0

3	4	5	6	
REV.	DESCRIPTION	REVISOR	DATE	APPROVED
0		LJ.Zhang	07.20.2015	David

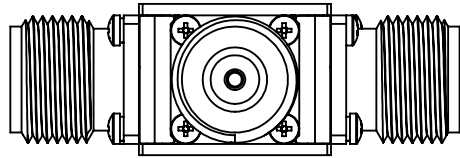

SPECIFICATIONS	
Part's Number	JCC1498T1502N20
Frequency(GHz)	1.498~1.502
Direction	-
Insertion Loss(dB)MAX	0.22
Isolation(dB)MIN	22.0
Return Loss(dB)MIN	22.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	200/200/-
Operating Temperature(°C)	-30~+75
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

JQL JQL Electronic Inc					
MATERIAL: STEEL		DWG NO: JCC1498T1502N20			
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	LJ.Zhang	07.20.2015	SCALE
DESCRIPTION: COAXIAL CIRCULATOR		CHK'D BY:			1:1
		APPV'D BY:			
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.