

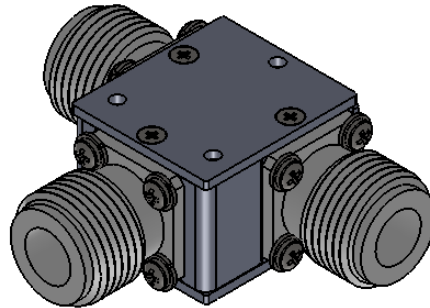


1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISOR	DATE	APPROVED	
REV.	A/0					0		M.Hao	09.30.2013	David	

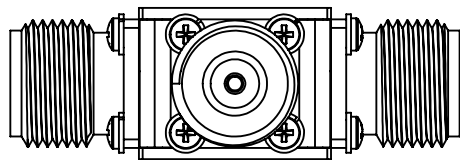

SPECIFICATIONS	
Part's Number	JCC2700T2900N20
Frequency(GHz)	2.700~2.900
Direction	-
Insertion Loss(dB)MAX	0.30
Isolation(dB)MIN	23.0
Return Loss(dB)MIN	23.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	200/200/-
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

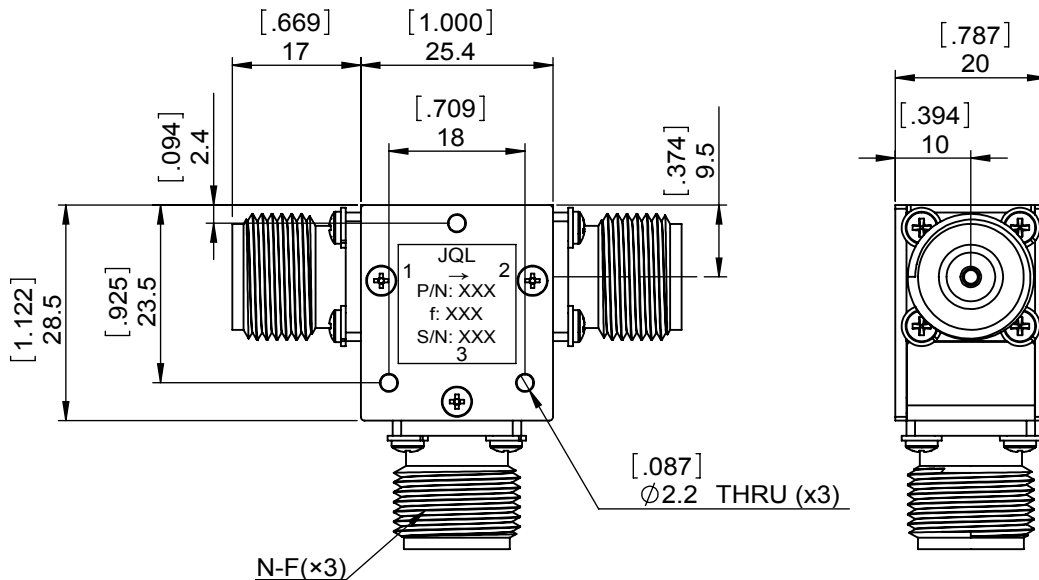

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc	
MATERIAL: STEEL	DWG NO: JCC2700T2900N20
SURFACE TREATMENT: NICKEL PLATING	DWG BY: M.Hao 09.30.2013 SACLE
	CHK'D BY:
DESCRIPTION: COAXIAL CIRCULATOR	APPV'D BY:
	Unit: mm[inch] Tolerance: Liner: ±0.25 Anguar: ±0.5°
	The First: 1:1
	A4