


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	ZC.Wu	DATE	07.24.2014	APPROVED	David



SPECIFICATIONS	
Part's Number	JCWR51-44A-12K6T13K4
Frequency(GHz)	12.600~13.400
Direction	
Insertion Loss(dB)MAX	0.25@25°C 0.25@-20~60°C
Isolation(dB)MIN	23@25°C 20@-20~60°C
Return Loss(dB)MIN	23@25°C 21@-20~60°C
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	10/10/-
Operating Temperature(°C)	-20~60
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-

JQL JQL Electronic Inc				
MATERIAL: AL		DWG NO: JCWR51-44A-12K6T13K4		
SURFACE TREATMENT: CHEM FILM		DWG BY:	ZC.Wu	07.24.2014
DESCRIPTION: WAVE GUIDE CIRCULATOR		CHK'D BY:		SCALE
		APPV'D BY:		1:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

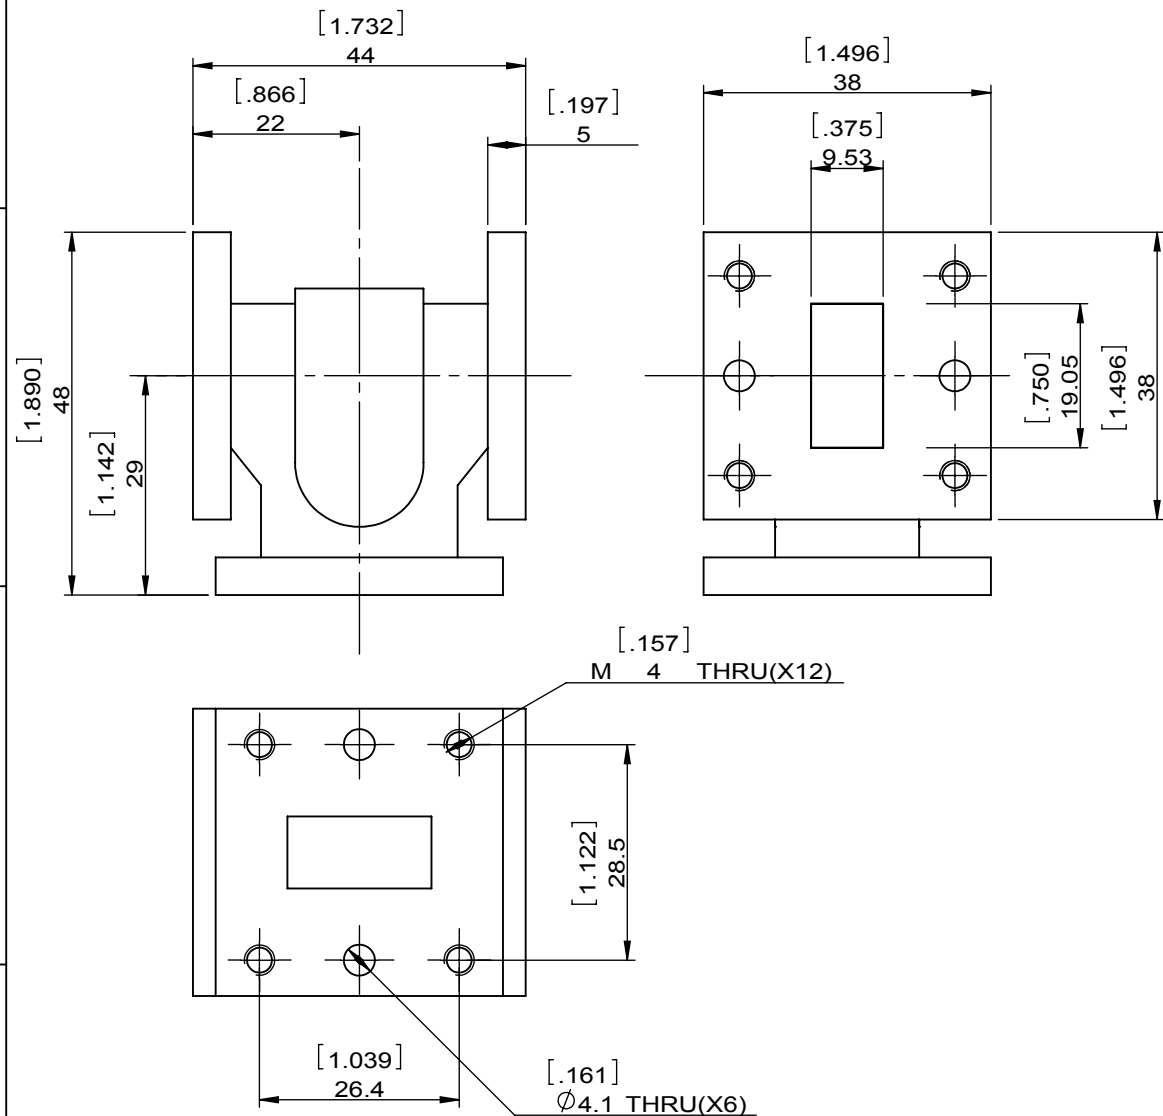

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.