



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
REV.	A/0	0		ZC.Wu	10.17.2014	David					



SPECIFICATIONS	
Part's Number	JCWR62-42-13K75T14K5
Frequency(GHz)	13.75~14.50
Direction	
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.8
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	25/25/-
Operating Temperature(°C)	-55~70
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-

JQL JQL Electronic Inc				
MATERIAL: AL		DWG NO: JCWR62-42-13K75T14K5		
SURFACE TREATMENT: CHEM FILM		DWG BY:	ZC.Wu	10.17.2014
DESCRIPTION: WAVEGUIDE CIRCULATOR		CHK'D BY:		SCALE
		APP'V'D BY:		2:3
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:		A4

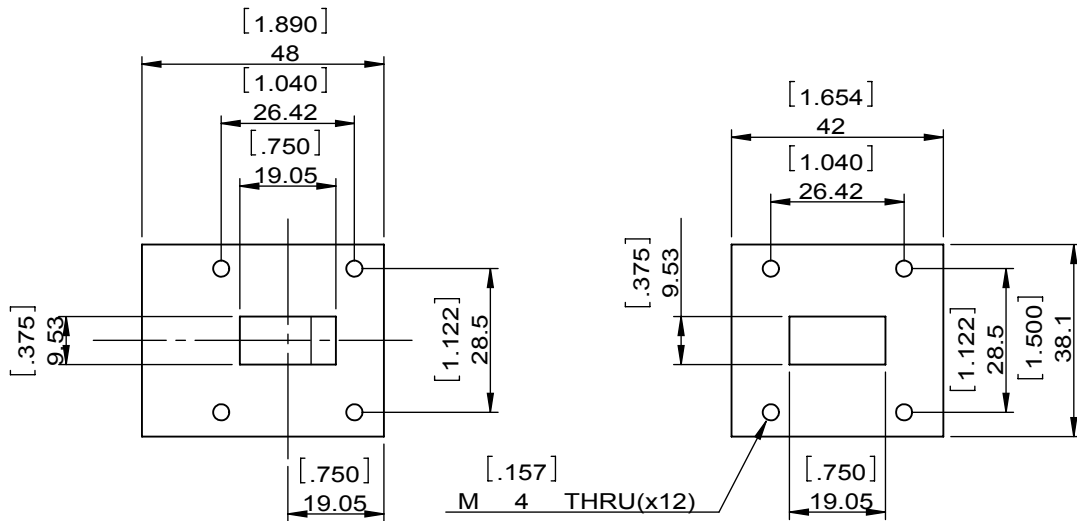

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.