



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				ZC.Wu	10.17.2014	David			



SPECIFICATIONS	
Part's Number	JCWR62-42-14K5T15K5
Frequency(GHz)	14.5~15.50
Direction	
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.8
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	15/15/-
Operating Temperature(°C)	-35~70
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b> AL		<b>DWG NO:</b> JCWR62-42-14K5T15K5		
<b>SURFACE TREATMENT:</b> CHEM FILM		DWG BY:	ZC.Wu	10.17.2014
<b>DESCRIPTION:</b> WAVEGUIDE CIRCULATOR		CHK'D BY:		SCALE
		APP'V'D BY:		2:3
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 
				A4

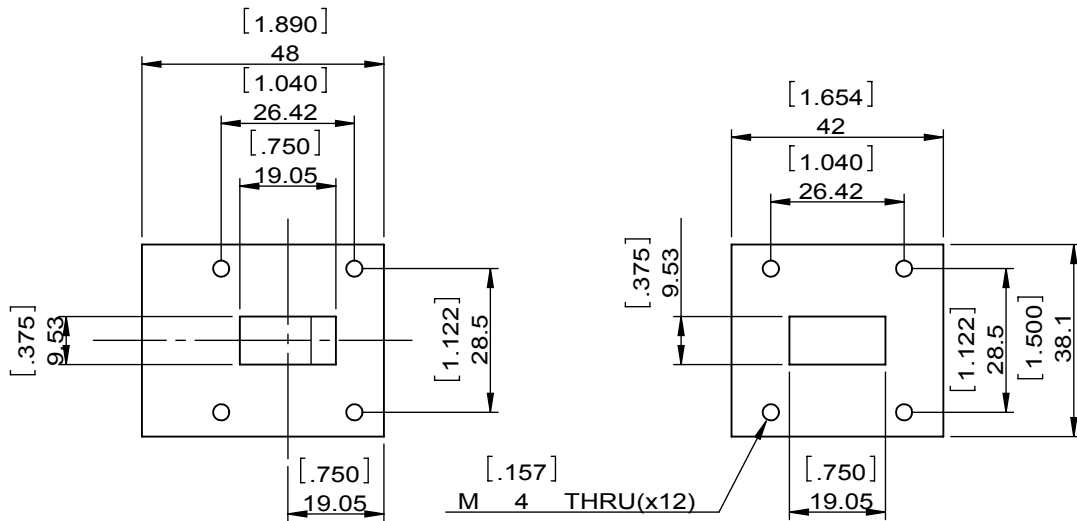

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.