


1	2
Document No.	QR4-700-T-003
REV.	A/0


5	6			
REV.	DESCRIPTION	REVISOR	DATE	APPROVE
0		MH	02.20.13	CH



**SPECIFICATION**

Part's Number: JCWR75-39-10K0T10K7  
 Frequency: 10.00~10.70GHz  
 Part's Number: JCWR75-39-10K7T11K7  
 Frequency: 10.70~11.70GHz  
 Part's Number: JCWR75-39-12K7T13K3  
 Frequency: 12.70~13.30GHz

Direction: CW  
 Insertion Loss: 0.15dB MAX.  
 Isolation: 28.0dB MIN.  
 RL: 28.0dB MIN.  
 Temperature: -40°C~+55°C  
 Altitude: Up to 15,000 FT  
 Operating: Up to 50,000 FT  
 Non Operating:

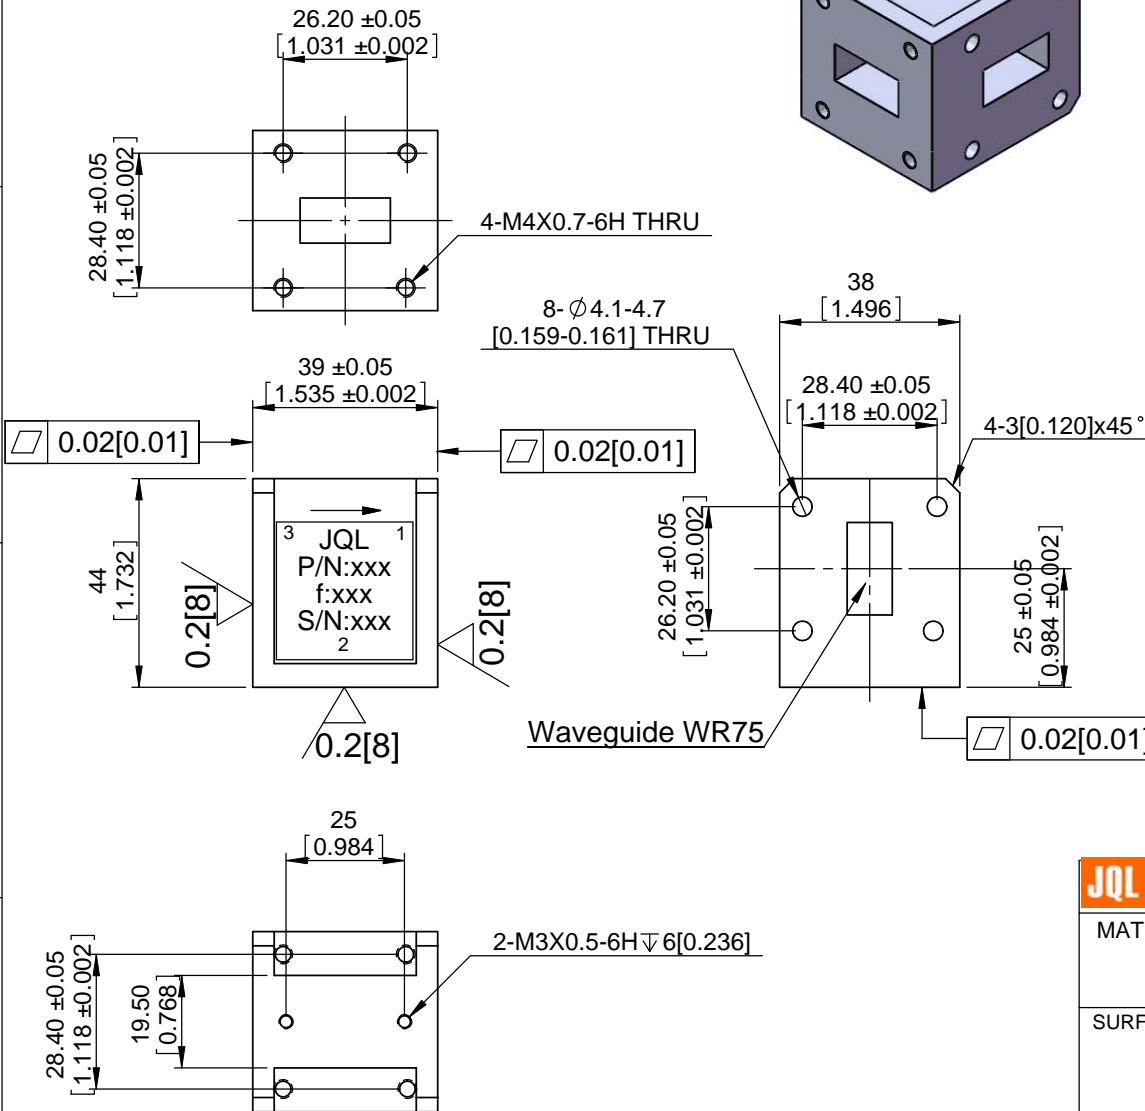

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

**JQL** JQL Electronic Inc

500 Lake Cook Road, Suite 350 Tel : 1(888)236-9828  
 Deerfield, IL 60015, USA Fax: 1(630)823-2902

MATERIAL:  
**ALUMINUM**

SURFACE TREATMENT:  
**CHEM FILM**

DESCRIPTION:  
**W/G CIRCULATOR**

DWG NO.  
**JCWR75-39-10K0T10K7**  
**JCWR75-39-10K7T11K7**  
**JCWR75-39-12K7T13K3**

DWG BY:	NAME	DATE	SCALE:
CHK'D BY:	MH	02.20.13	1:1
APP'VD BY:			
Unit: mm	TOLERANCE: Liner: ±0.1mm Angular: ±0.5°	Type Of Projection	A4

NOTES: PART MUST BE COMPLIANCE WITH 168H IN SALT MIST SPRAY.

WEIGHT:

SHEET 1 OF 1