Document No.	QR4-700-T-003
REV.	A/0

REV.	DESCRIPTION	REVISOR	DATE	APPROVED
0		ZQ.H	09.07.2015	David

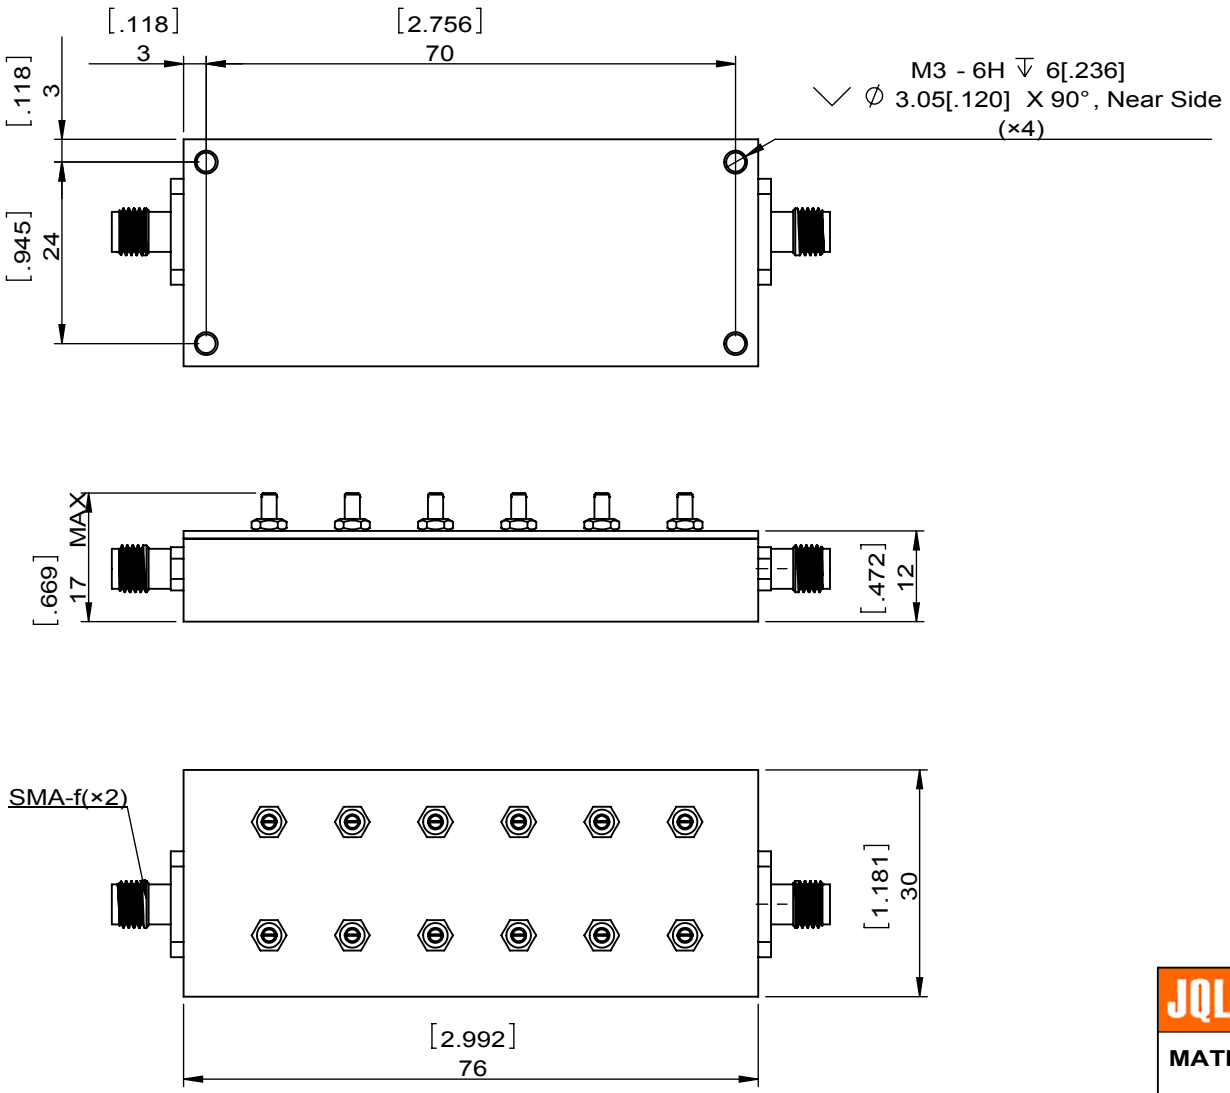

ITEM	SPECIFICATIONS
Frequency(MHz)	8500~9500
Insertion Loss(dB)	1.2 Max
Rejection(dB)	15 Min@8400Mhz and 9600Mhz
Return Loss(dB)	16Min
Impedance(Ω)	50
Matching	Amplitude ±0.5dB Max;Phase ±3°Max
Temperature(℃)	-40~+85
Connector	SMA FEMALE
Notes	

JQL Electronic Inc

MATERIAL:

DWG NO: JFCB8500T9500SF

SURFACE TREATMENT: Sliver plating

DESCRIPTION: FILTER

DWG BY:	ZQ.H	09.07.2015	SACLE
CHK'D BY:			1:1
APPV'D BY:			
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4

RoHS COMPLIANCE

This document is the property of JQL Electronic Inc.
It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

WEIGHT:

SHEET 1 OF 1