
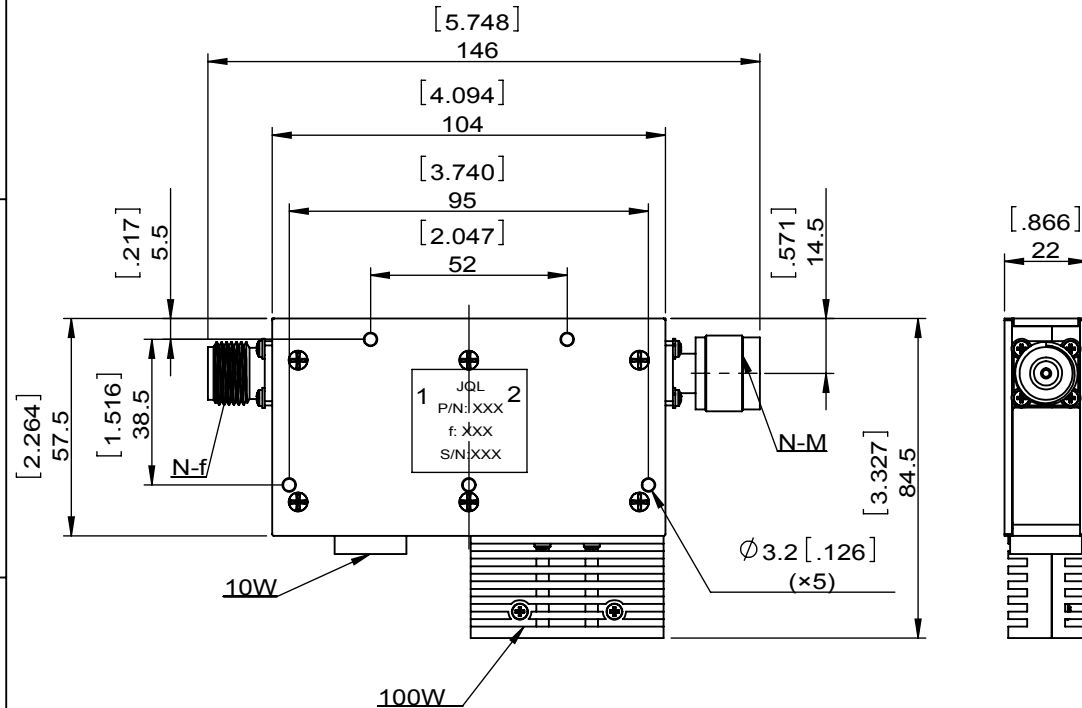
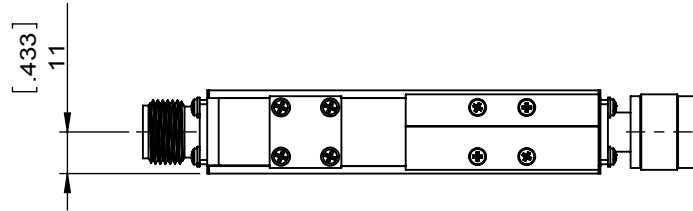


1	2
Document No.	QR4-700-T-003
REV.	A/0

3	4	5	6
REV.	DESCRIPTION	REVISOR	DATE
0		LJ.Zhang	04.23.2014
			APPROVED
			David

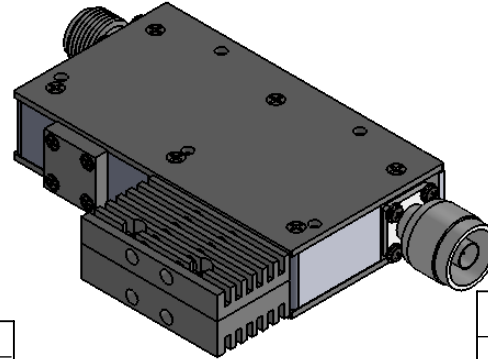

SPECIFICATIONS	
Part's Number	J12C0390T0410NFM10
Frequency(GHz)	0.390~0.410
Direction	CW
Insertion Loss(dB)MAX	0.50
Isolation(dB)MIN	48.0
Return Loss(dB)MIN	21.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	250/100/-
Operating Temperature(°C)	-30~+60
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	100&10
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

JQL Electronic Inc

MATERIAL: STEEL	DWG NO: J12C0390T0410NFM10			
	DWG BY:	LJ.Zhang	04.23.2014	SACLE
SURFACE TREATMENT: NICKEL PLATING	CHK'D BY:			
	APPV'D BY:			1:2
DESCRIPTION: DUAL COAXIAL ISOLATOR	Unit:	Tolerance:	The First:	A4
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.