



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZC.Wu	10.17.2014	David					

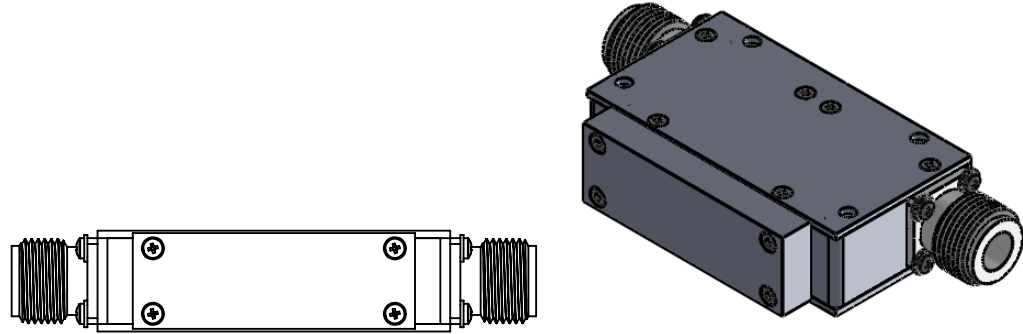

SPECIFICATIONS	
Part's Number	J12C0690T0960A2N1
Frequency(GHz)	0.690~0.960
Direction	-
Insertion Loss(dB)MAX	1.0
Isolation(dB)MIN	20±2
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	10/10/-
Operating Temperature(°C)	-30~+75
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	10/10
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-

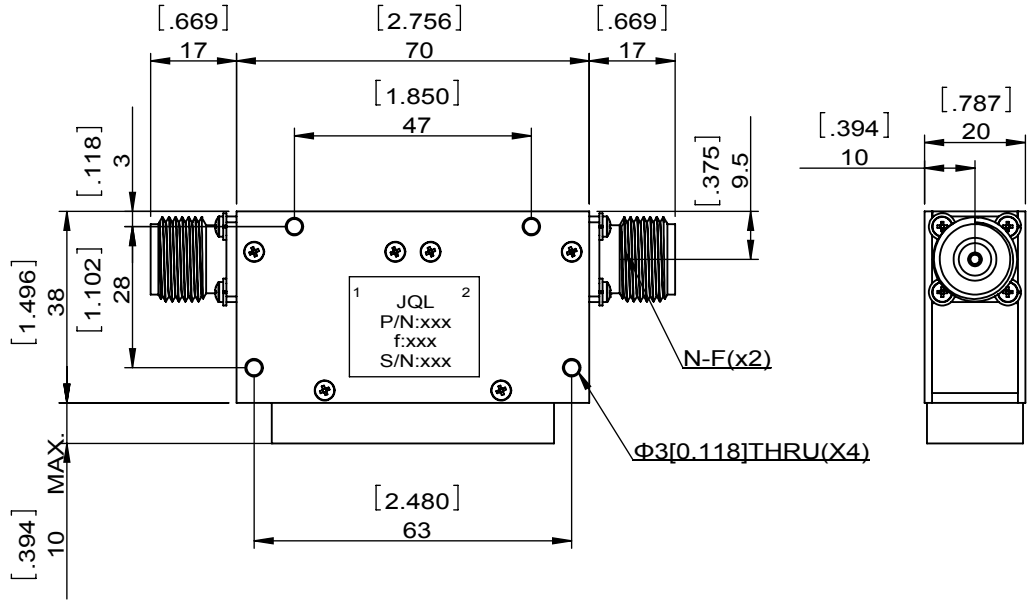

JQL JQL Electronic Inc				
MATERIAL: STEEL		DWG NO: J12C0690T0960A2N1		
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	ZC.Wu	10.17.2014
DESCRIPTION: DUAL COAX CIRCULATOR		CHK'D BY:		SCALE
		APPV'D BY:		2:3
Unit:	Tolerance:	The First:		A4
mm[inch]	Liner: ±0.25 Anguar: ±0.5°			



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.