


1	2		3	4	5		6		
Document No.	QR4-700-T-003		REV.	DESCRIPTION	REVISOR	DATE	APPROVED		
REV.	A/0		0		ZC.Wu	06.26.2014	David		



SPECIFICATIONS	
Part's Number	J12C0700T0800S1
Frequency(GHz)	0.700~0.800
Direction	CW
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	40.0
Return Loss(dB)MIN	22.0
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	100/10/-
Operating Temperature(°C)	-30~+75
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	100/-
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	

<b>JQL</b>		<b>JQL Electronic Inc</b>			
<b>MATERIAL:</b> STEEL		<b>DWG NO:</b> J12C0700T0800S1			
<b>SURFACE TREATMENT:</b> NICKEL PLATING		DWG BY:	ZC.Wu	06.26.2014	SACLE
<b>DESCRIPTION:</b> DUAL COAXIAL CIRCULATOR		CHK'D BY:			
		APPV'D BY:			<b>1:2</b>
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	<b>A4</b>

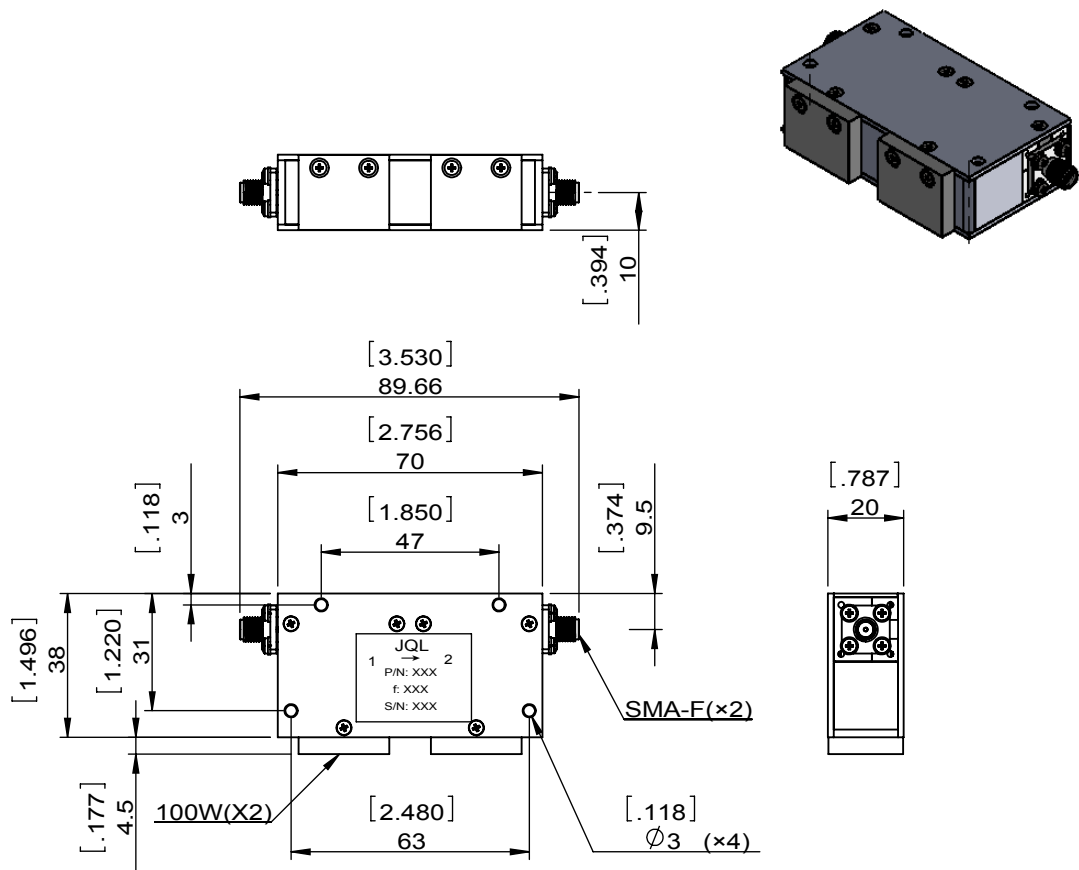

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.