

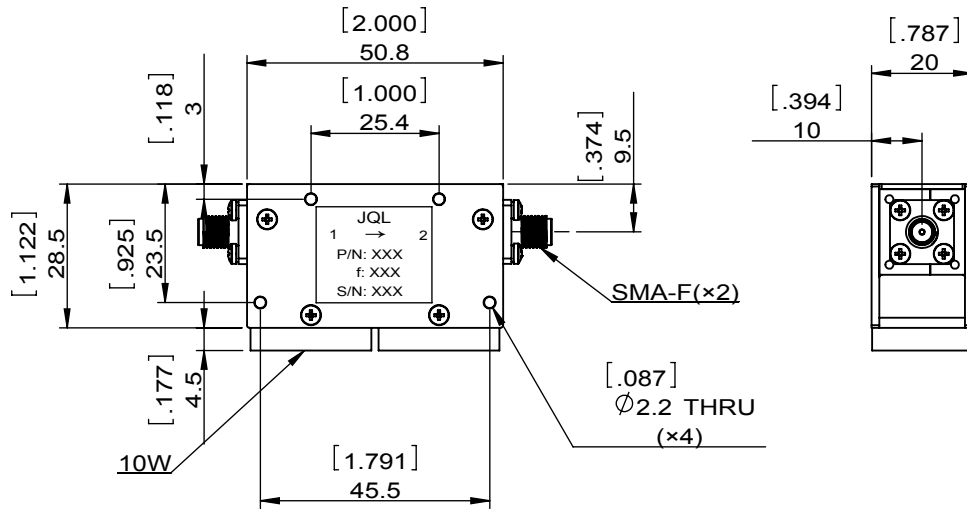


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZC.Wu	10.17.2014	David					



SPECIFICATIONS	
Part's Number	J12C1200T1400S0
Frequency(GHz)	1.200~1.400
Direction	CW
Insertion Loss(dB)MAX	0.80
Isolation(dB)MIN	40.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	5/5/-
Operating Temperature(°C)	-20~+80
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	10/-
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b> STEEL		<b>DWG NO:</b> J12C1200T1400S0		
<b>SURFACE TREATMENT:</b> NICKLE PLAINING		DWG BY:	ZC.Wu	10.17.2014
<b>DESCRIPTION:</b> DUAL COAXIAL ISOLATOR		CHK'D BY:		SCALE
		APPV'D BY:		2:3
		Unit:	Tolerance:	The First:
		mm[inch]	Liner: ±0.25	Angular: ±0.5°
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.