
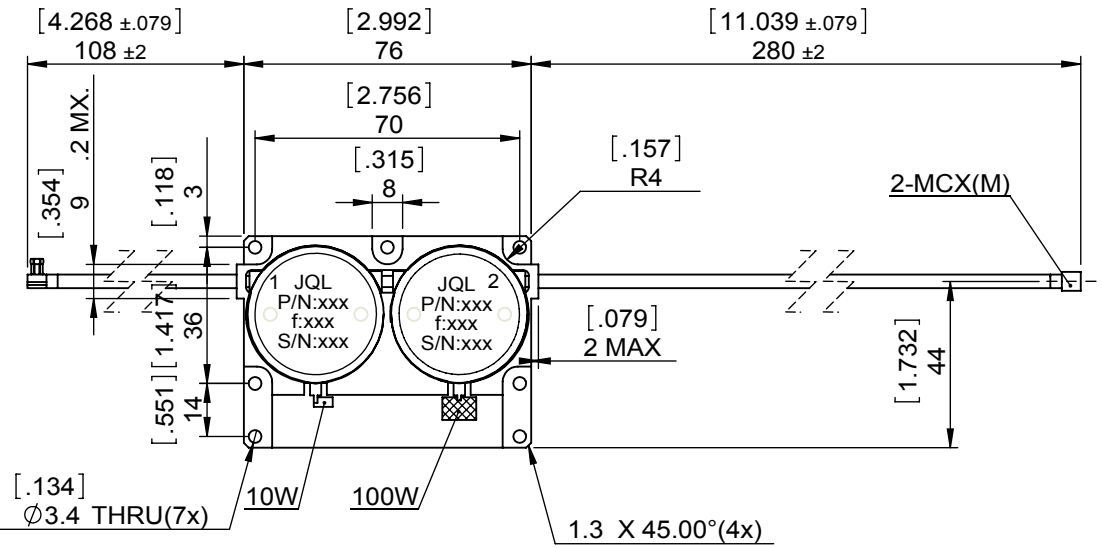
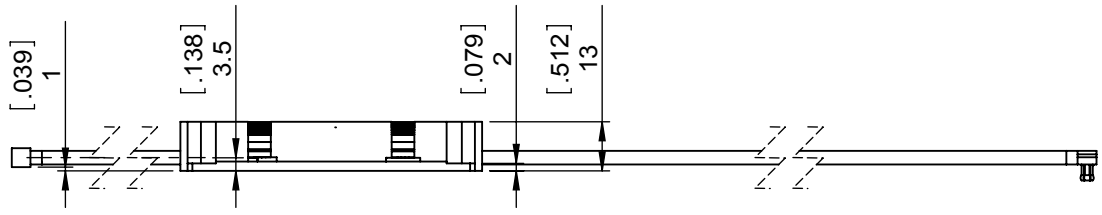


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	M.Hao	DATE	05.23.2013	APPROVED	David

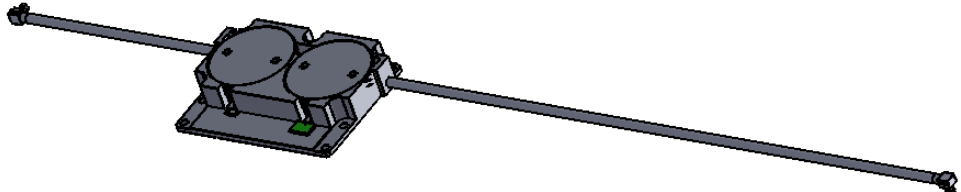

SPECIFICATIONS	
Part's Number	J12D0390T0400MCX
Frequency(GHz)	0.390~0.400
Direction	CW
Insertion Loss(dB)MAX	0.5dB(NOT INCLUDING CABLELES) 0.6dB(ESTIMATED INCLUDING CABLES)
Isolation(dB)MIN	40.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	IMD:-60dBc 2X42dBm 3rd ORDER IM: -70 dBc 1X47dBm & 1X40dBm
Power FWD/REV/PK(Watt)	100/30/-
Operating Temperature(°C)	-20~+70
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	MCX-M Cable:Equivalent to H&S Enviroflex 316D

JQL **JQL Electronic Inc** 500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA Tel: 1(888)236-9828 Fax: 1(888)823-2902

MATERIAL: STEEL	DWG NO: J12D0390T0400MCX			
SURFACE TREATMENT: NICKEL PLATING	DWG BY:	M.Hao	05.23.2013	SACLE
	CHK'D BY:			
DESCRIPTION: CABLE ISOLATOR	APPV'D BY:			1:2
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4

RoHS COMPLIANCE
This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.