

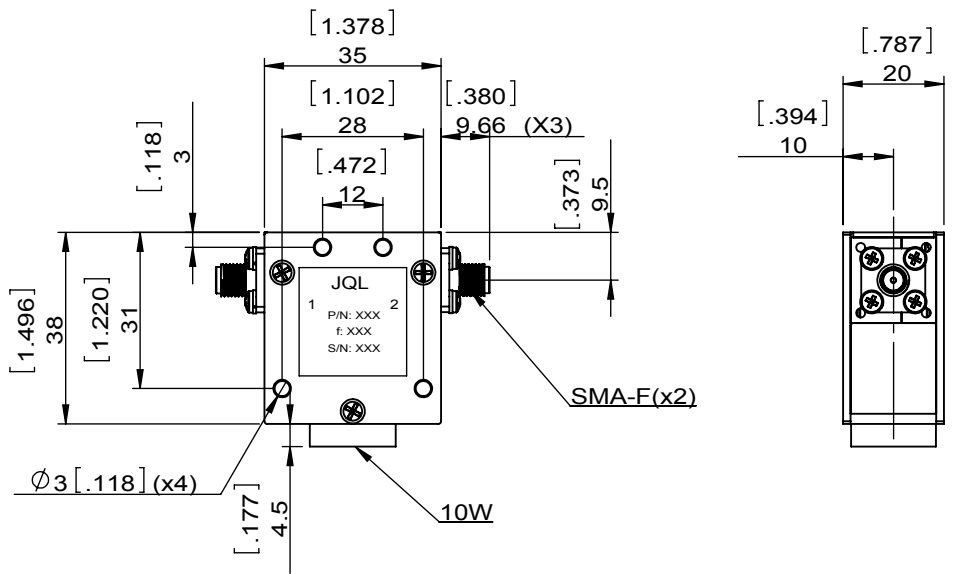


1		2		3		4		5		6	
Document No.		QR4-700-T-003		REV.		A/0		REV.		DESCRIPTION	
REV.		A/0		REV.		0		ZC.Wu		DATE	
								02.12.2015		APPROVED	
								David			



SPECIFICATIONS	
Part's Number	JIC0400T0470S0
Frequency(GHz)	0.400~0.470
Direction	CW
Insertion Loss(dB)MAX	0.6
Isolation(dB)MIN	20
Return Loss(dB)MIN	19
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	5/5/-
Operating Temperature(°C)	-30~+85
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	10W-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

JQL JQL Electronic Inc				
MATERIAL: STEEL		DWG NO: JIC0400T0470S0		
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	ZC.Wu	02.12.2015
DESCRIPTION: COAX ISOLATOR		CHK'D BY:		SCALE
		APPV'D BY:		2:3
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.