
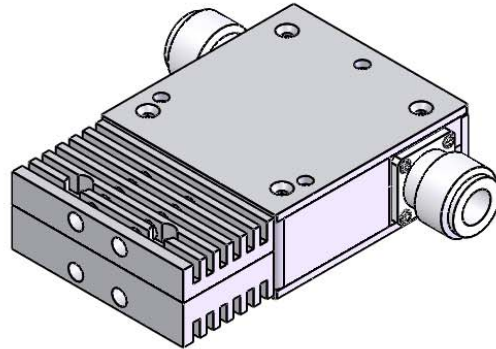



1	2
Document No.	QR4-700-T-003
REV.	A/0

5	6			
REV.	DESCRIPTION	REVISOR	DATE	APPROVE
0		MH	01.16.13	CH



SPECIFICATION

Part's Number: JIC0470T0512N15
 Frequency: 0.470~0.512GHz
 Insertion Loss: 0.25dB MAX.
 Isolation: 25dB MIN.
 VSWR: 1.20:1 MAX.
 Power FWD/REV : 200W/100W
 Termination: 100W
 Temperature Operating: -30°C~ +60°C
 Storage: -55°C~ +125°C
 Connector: N-F

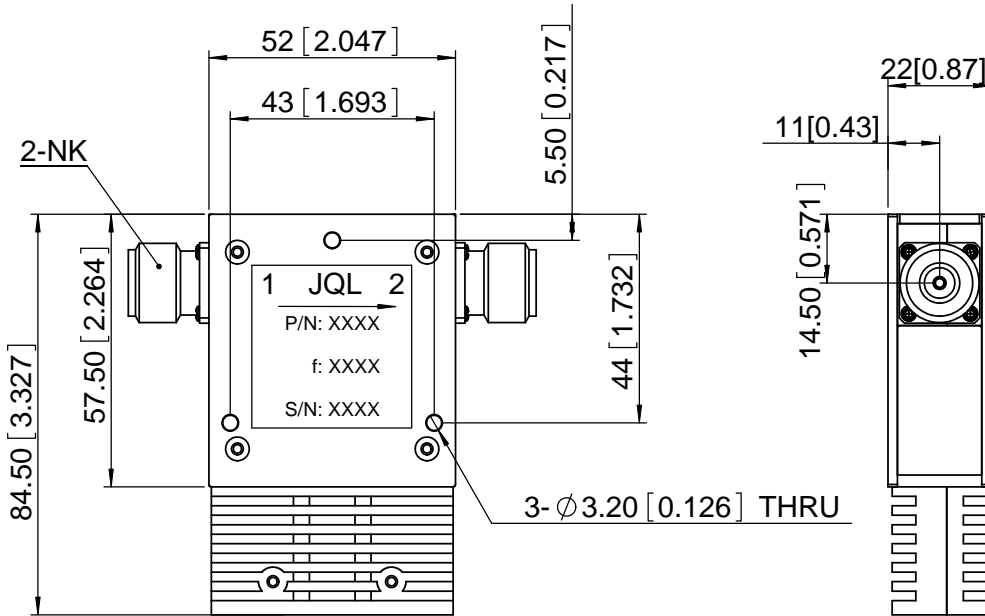

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc

MATERIAL:	DWG NO.
SURFACE TREATMENT:	JIC0470T0512N15
DESCRIPTION:	COAXIAL ISOLATOR

DWG BY:	NAME	DATE	SCALE:
CHK'D BY:	MH	01.16.13	
APPVD BY:			
Unit: mm[inch]	TOLERANCE: Liner: ±0.1mm Angular: ±0.5°	Type Of Projection	

WEIGHT: