

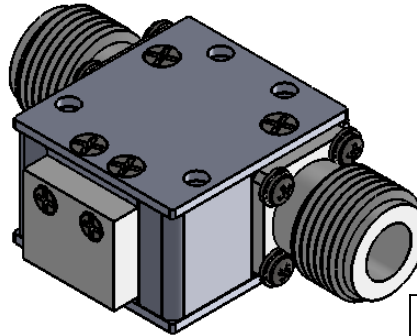


| | |
|--------------|---------------|
| 1 | 2 |
| Document No. | QR4-700-T-003 |
| REV. | A/0 |

| 3 | 4 | 5 | 6 |
|------|-------------|----------|------------|
| REV. | DESCRIPTION | REVISOR | DATE |
| 0 | | LJ.Zhang | 04.22.2014 |
| | | | APPROVED |
| | | | David |

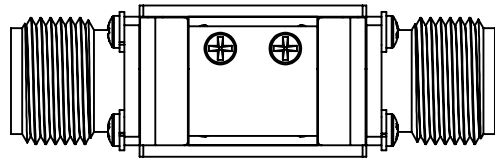

| SPECIFICATIONS | |
|---------------------------------|----------------|
| Part's Number | JIC0763T0776N1 |
| Frequency(GHz) | 0.763~0.776 |
| Direction | - |
| Insertion Loss(dB)MAX | 0.25 |
| Isolation(dB)MIN | 19.0 |
| Return Loss(dB)MIN | 19.0 |
| 3rd IMD(dBc)MAX | - |
| Power FWD/REV/PK(Watt) | 125/10/- |
| Operating Temperature(°C) | -30~+75 |
| Storage Temperature(°C) | - |
| 2nd/3rd Harmonic(dBc) | - |
| Termination/Attenuator(Watt/dB) | 10 |
| Tab(W×LG×THK)(mm[Inch]) | - |
| Additional Notes | - |

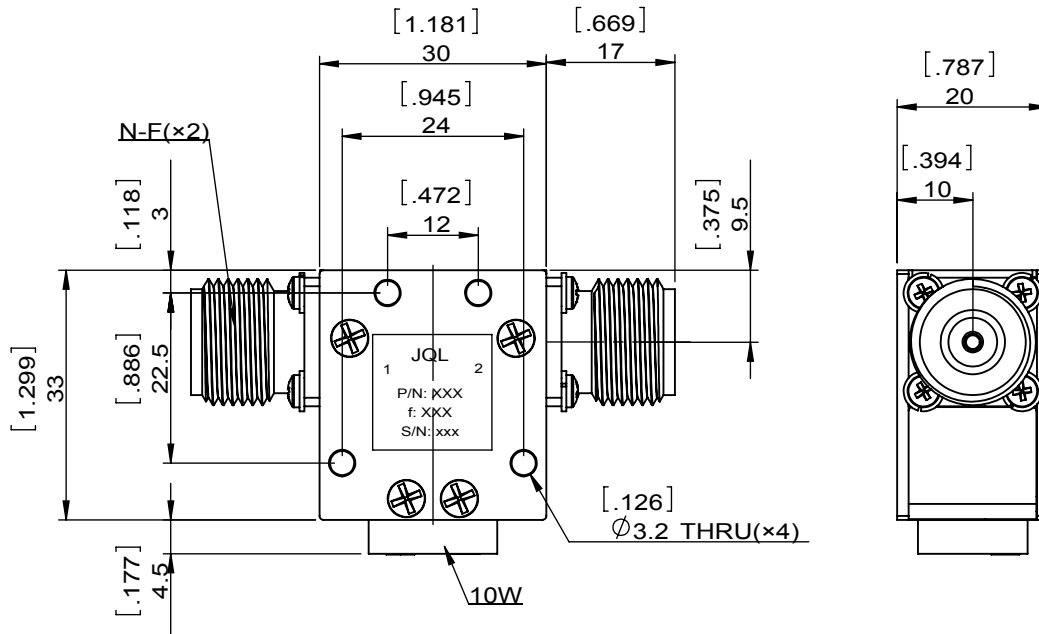

| | |
|---|--|
| JQL JQL Electronic Inc | |
| MATERIAL: STEEL | DWG NO: JIC0763T0776N1 |
| SURFACE TREATMENT: NICKEL PLATING | DWG BY: LJ.Zhang CHK'D BY: APPV'D BY: |
| DESCRIPTION: COAXIAL ISOLATOR | 04.22.2014 SACLE 1:1 |
| Unit: mm[inch] | Tolerance: Liner: ±0.25 Anguar: ±0.5° The First: |
| | A4 |



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.