



1	2
Document No.	QR4-700-T-003
REV.	A/0


5	6			
REV.	DESCRIPTION	REVISOR	DATE	APPROVE
0		ZLJ	11.05.12	CH



SPECIFICATION

Part's Number: JIC0850T0870SFSM0
 Frequency: 0.850~0.870 GHz

Direction: CW
 Isolation: 25dB MIN.
 Insertion Loss: 0.3dB MAX.
 VSWR: 1.2:1 MAX.
 Power: 5W AVG
 Temperature: -20°C~+70°C
 Connector: SMA-F INPUT
 SMA-M OUTPUT

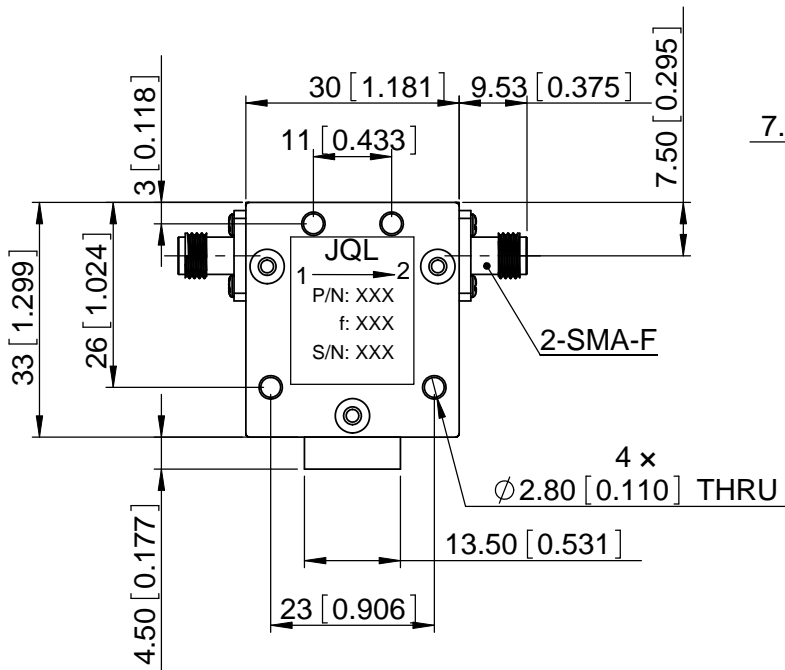

CONNECTOR OPTION: SMA-F DEFAULT
 SMA-M OPTIONAL
 PLEASE SEE THE SPECS FOR DETAILS



This document is the property of JQL Electronic Inc.
 It cannot be copied, duplicated, used for manufacturing purposes
 or communicated to third party as a whole or partly,
 without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc

PACKAGE CODE: TH101-S1	DWG NO. JIC0850T0870SFSM0
SURFACE TREATMENT: NICKEL PALTING	
DESCRIPTION: COAX CIRCULATOR	

DWG BY: ZLJ	NAME ZLJ	DATE 11.05.12	SCALE:
CHK'D BY:			
APP'VD BY:			
Unit: mm/inch	TOLERANCE: Liner: ±0.25mm Angular: ±0.5°	Type Of Projection 	

WEIGHT: