
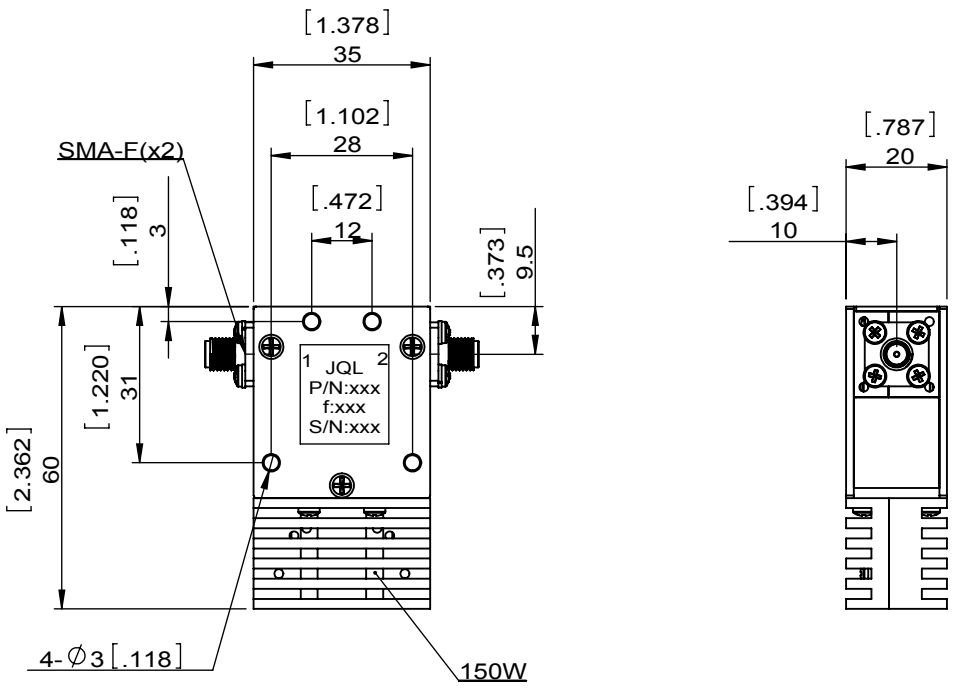


1	2	3	4	5	6
---	---	---	---	---	---

Document No. QR4-700-T-003
REV. A/0

REV.	DESCRIPTION	REVISOR	DATE	APPROVED
0		ZC.Wu	09.02.2014	David

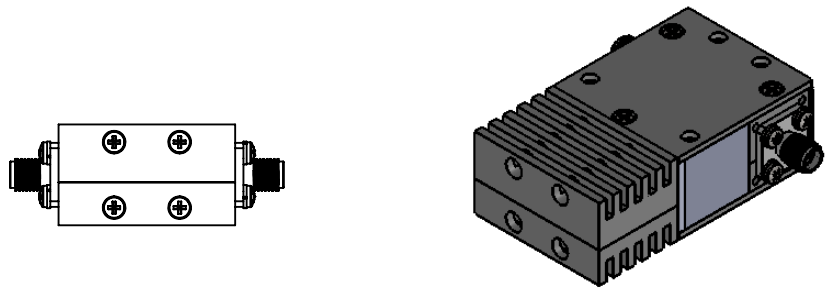

SPECIFICATIONS	
Part's Number	JIC0925T0960S10
Frequency(GHz)	0.925~0.960
Direction	-
Insertion Loss(dB)MAX	0.25
Isolation(dB)MIN	22.0
Return Loss(dB)MIN	22.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	100/100/-
Operating Temperature(°C)	-20~+80
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	150
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

JQL
JQL Electronic Inc

<b>MATERIAL:</b> STEEL	<b>DWG NO:</b> JIC0925T0960S10																
<b>SURFACE TREATMENT:</b> NICKEL PLATING	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="font-size: 0.8em;">DWG BY:</td> <td style="font-size: 0.8em;">ZC.Wu</td> <td style="font-size: 0.8em;">09.02.2014</td> <td style="font-size: 0.8em;">SCALE</td> </tr> <tr> <td style="font-size: 0.8em;">CHK'D BY:</td> <td></td> <td></td> <td></td> </tr> <tr> <td style="font-size: 0.8em;">APPV'D BY:</td> <td></td> <td></td> <td style="text-align: center; font-size: 1.2em;">2:3</td> </tr> <tr> <td style="font-size: 0.8em;">Unit: mm[inch]</td> <td style="font-size: 0.8em;">Tolerance: Liner: ±0.25 Anguar: ±0.5°</td> <td style="font-size: 0.8em;">The First:</td> <td style="text-align: center; font-size: 1.2em;">A4</td> </tr> </table>	DWG BY:	ZC.Wu	09.02.2014	SCALE	CHK'D BY:				APPV'D BY:			2:3	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4
DWG BY:	ZC.Wu	09.02.2014	SCALE														
CHK'D BY:																	
APPV'D BY:			2:3														
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4														
<b>DESCRIPTION:</b> COAX ISOLATOR																	



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or party, without the written consent of JQL Electronic Inc.