



1	2
Document No.	QR4-700-T-003
REV.	A/0

3	4	5	6	
REV.	DESCRIPTION	REVISOR	DATE	APPROVED
0		ZC.Wu	05.12.2014	David

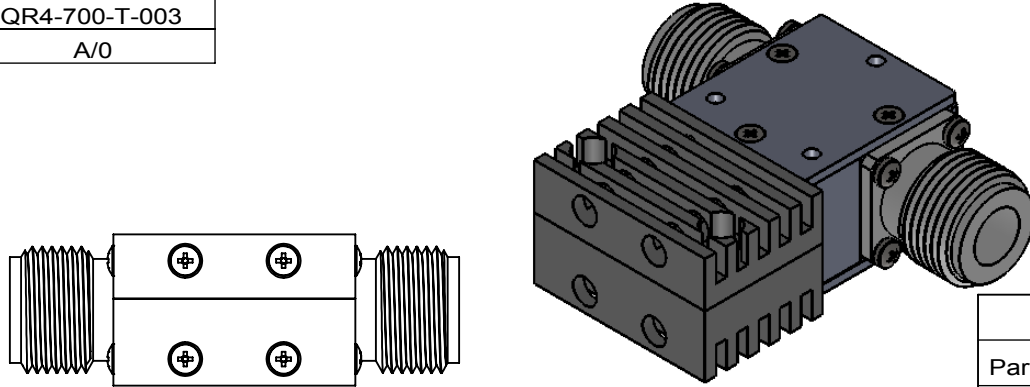

SPECIFICATIONS	
Part's Number	JIC1350T1850N20
Frequency(GHz)	1.350~1.850
Direction	
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	200/60/-
Operating Temperature(°C)	-30~+70
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	200
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

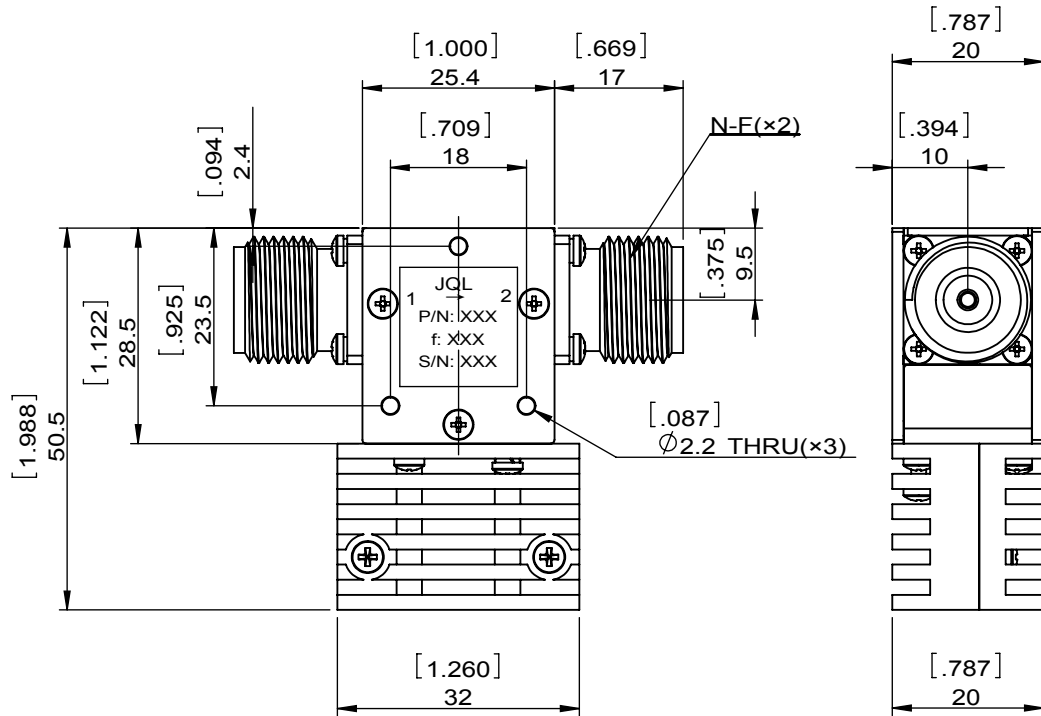

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

**JQL** JQL Electronic Inc

<b>MATERIAL:</b> STEEL	<b>DWG NO:</b> JIC1350T1850N20
<b>SURFACE TREATMENT:</b> NICKEL PLATING	DWG BY: ZC.Wu CHK'D BY: APPV'D BY:
<b>DESCRIPTION:</b> COAXIAL ISOLATOR	05.12.2014 SACLE
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°
	The First:
	1:1 A4