
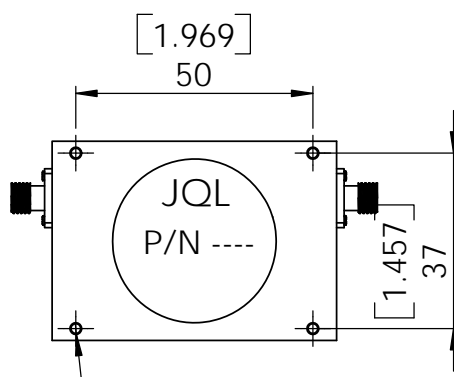



5		6		
REV.	DESCRIPTION	REVISOR	DATE	APPROVE

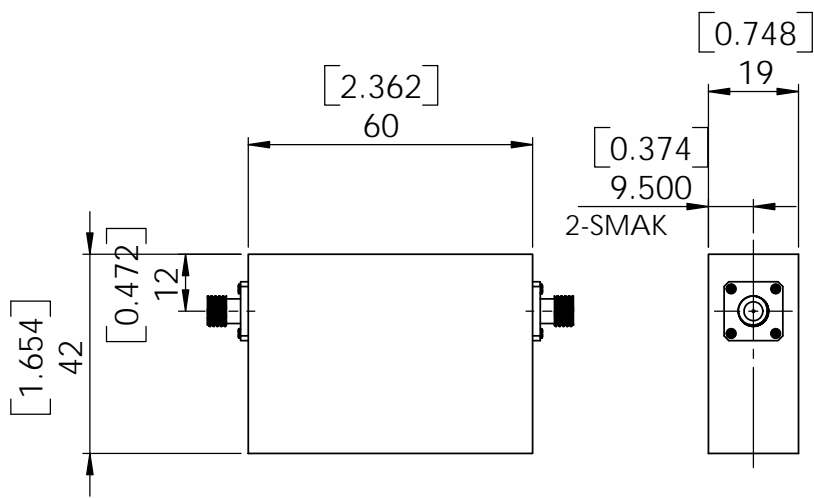

SPECIFICATIONS

P/N: JIC2000T8000S1
 FREQ: 2.0~8.0GHz

ISOLATION: 12dB MIN
 INS LOSS: 1.5dB MAX
 VSWR: 1.8:1 MAX
 PWR FWD/REV 30W/10W
 CIRCULATION: CLOCKWISE
 CONNECTOR: SMA-F
 TEMPERATURE
 OPERATING: -40C~+75C
 STORAGE: -55C~+125C

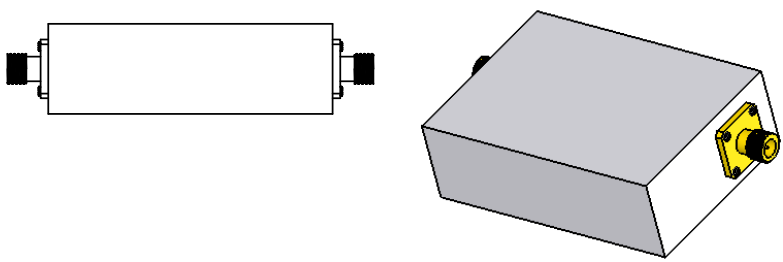

This document is the property of JQL Electronic Inc.
 It cannot be copied, duplicated, used for manufacturing purposes
 or communicated to third party as a whole or partly,
 without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc		500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA		Tel : 1(888)236-9828 Fax: 1(630)823-2902	
MATERIAL: STEEL		DWG NO. JIC2000T8000S1			
SURFACE TREATMENT: NICKEL PLATING		NAME		DATE	SIGNATURE
DESCRIPTION: COAX ISOLATOR		DWG BY:			REV: 0
		CHK'D BY:			
		APPV'D BY:			
		TOLERANCE		Q.A	A4
		Liner: ±0.1mm			
		Angular: ±0.5°			