

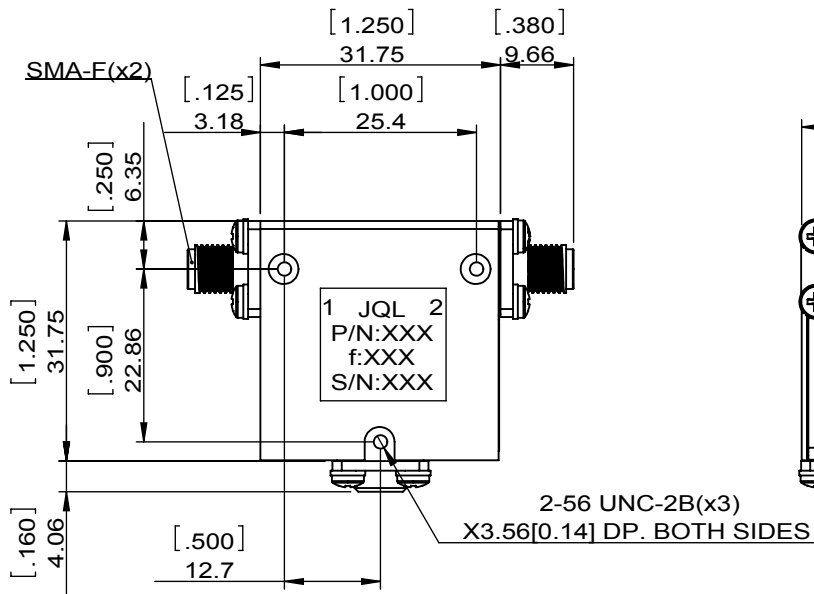


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		mw.Yang	07.13.2023	HC.Qiu			

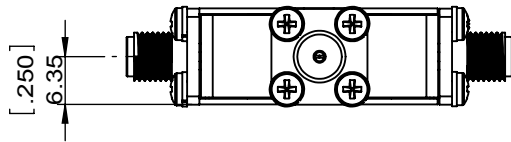

SPECIFICATIONS	
Part's Number	JIC3000T5000S1
Frequency(GHz)	3.000~5.000
Direction	-
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	19.0
Return Loss(dB)MIN	19.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	25/1/-
Operating Temperature(°C)	0~+50
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

<b>JQL</b> JQL Technologies Corporation				
<b>MATERIAL:</b> STEEL		<b>DWG NO:</b> JIC3000T5000S1		
<b>SURFACE TREATMENT:</b> NICKEL PLATING		DWG BY:	mw.Yang	07.13.2023
<b>DESCRIPTION:</b> COAXIAL ISOLATOR		CHK'D BY:		SCALE
		APPV'D BY:		1:1
		Unit:	Tolerance:	The First:
		mm[inch]	Liner: ±0.25 Anguar: ±0.5°	
				A4

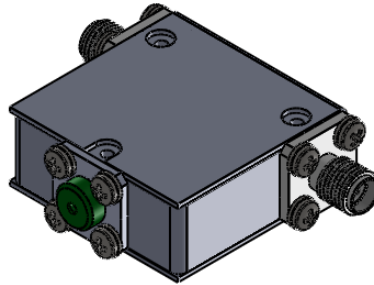

This document is the property of JQL Technologies Corporation. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Technologies Coration