

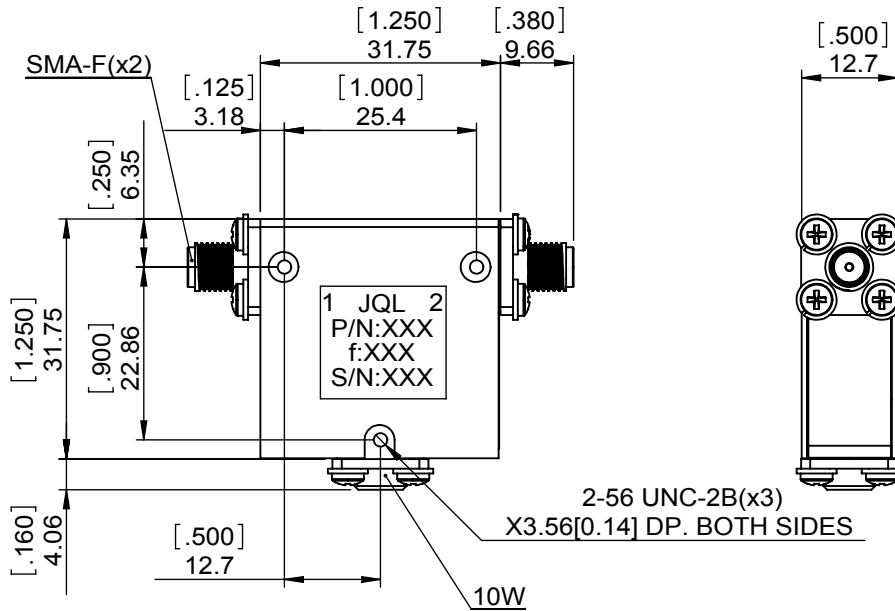


1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISOR	DATE	APPROVED	
REV.	A/0					0		JP.Yang	08.22.2013	David	

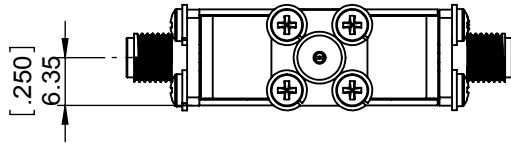

SPECIFICATIONS	
Part's Number	JIC3000T6000S1R
Frequency(GHz)	3.000~6.000
Direction	-
Insertion Loss(dB)MAX	0.60
Isolation(dB)MIN	17.0
Return Loss(dB)MIN	15.6
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	30/10/-
Operating Temperature(°C)	-30~+70
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	10
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

<b>JQL JQL Electronic Inc</b>				
<b>MATERIAL:</b> STEEL		<b>DWG NO:</b> JIC3000T6000S1R		
<b>SURFACE TREATMENT:</b> NICKEL PLATING		DWG BY:	JP.Yang	08.22.2013
<b>DESCRIPTION:</b> COAXIAL ISOLATOR		CHK'D BY:		SACLE
		APP'VD BY:		1:1
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:		A4

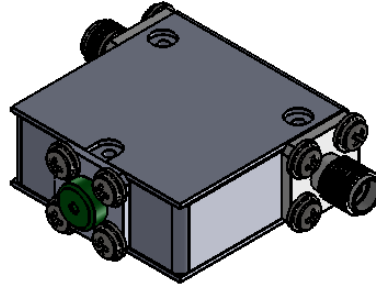

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.