

Stock Number





REV.	DESCRIPTION	REVISOR	DATE	APPROVE
0		LS	08.31.11	CH

SPECIFICATION

Part's Number: JIC3700T4200FS1
 Frequency: 3.7 ~4.2 GHz

Direction: CW
 Insertion Loss: 0.4dB MAX.
 Isolation: 20dB MIN.
 ReturnLoss: 19.0dB MIN.
 Power FWD/REV: 30W/ 10W
 Connector: SMA-f

Temperature: -40°C~ +85°C

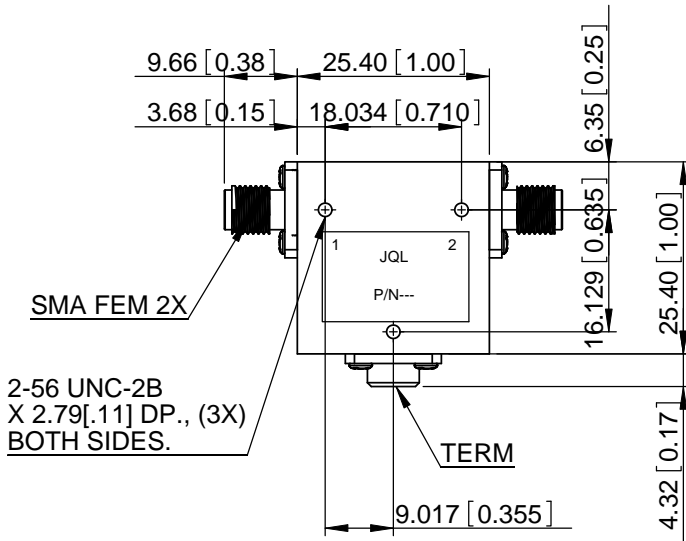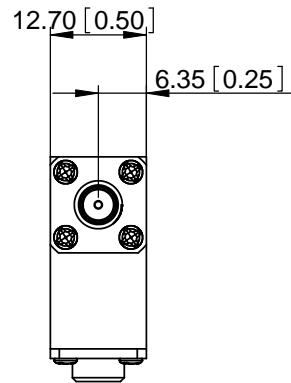

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc		PACKAGE CODE: E62		DWG NO. JIC3700T4200FS1	
SURFACE TREATMENT: nickel plating		DESCRIPTION: COAXIAL ISOLATOR coax isolator		Unit: mm	
2 PLACE DECIMALS ± 0.76[.03"] 3 PLACE DECIMALS ± 0.305[.012"]		Type Of Projection		SCALE: 1:1	
Unit: mm		APPV'D BY: CH		DATE: 08.31.11	
Unit: mm		CHK'D BY: FW		DATE: 08.31.11	
Unit: mm		DWG BY: LS		DATE: 08.31.11	
Unit: mm		APPV'D BY: CH		DATE: 08.31.11	
Unit: mm		APPV'D BY: CH		DATE: 08.31.11	
Unit: mm		APPV'D BY: CH		DATE: 08.31.11	
Unit: mm		APPV'D BY: CH		DATE: 08.31.11	

WEIGHT: