


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZC.Wu	06.28.2016	David					

SPECIFICATIONS	
Part's Number	JIC4415T5015S1
Frequency(GHz)	4.415~5.015
Direction	-
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	23.0
Return Loss(dB)MIN	21.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	25/10/-
Operating Temperature(°C)	-40~+70
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	--
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-

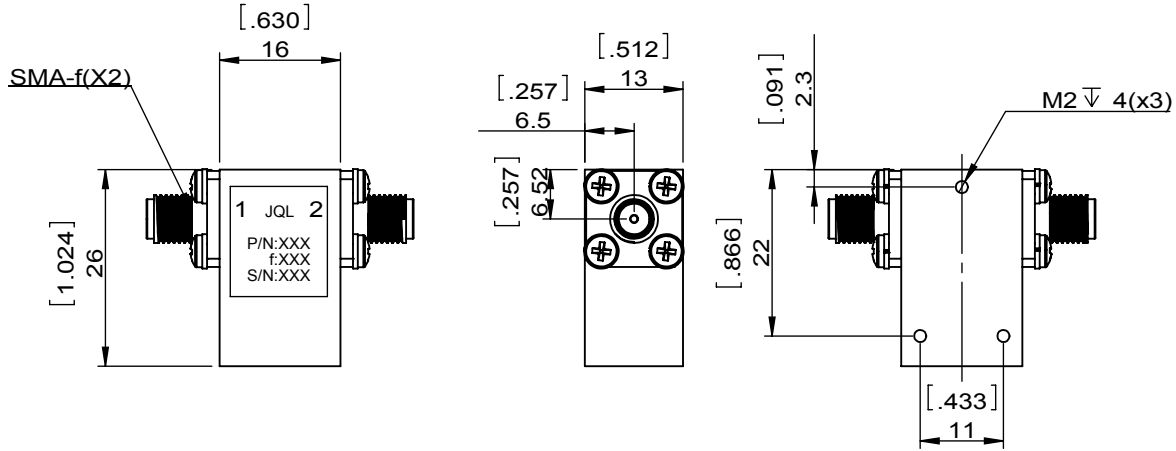

JQL JQL Electronic Inc

MATERIAL: STEEL	DWG NO: JIC4415T5015S1			
SURFACE TREATMENT: NICKEL PLATING	DWG BY:	ZC.Wu	06.28.2016	SCALE
DESCRIPTION: COAXIAL ISOLATOR	CHK'D BY:			1:1
	APPV'D BY:			
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.