





1		2		3		4		5		6	
Document No. QR4-700-T-003								REV. DESCRIPTION REVISOR DATE APPROVED			
REV. A/0								0		M.Hao 01.08.2014 CH	

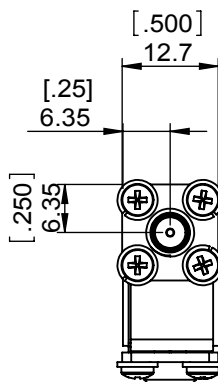

SPECIFICATIONS	
Part's Number	JIC5700T7100S1
Frequency(GHz)	5.700~7.100
Direction	CW
Insertion Loss(dB)MAX	0.40
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	10/10/-
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	10
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

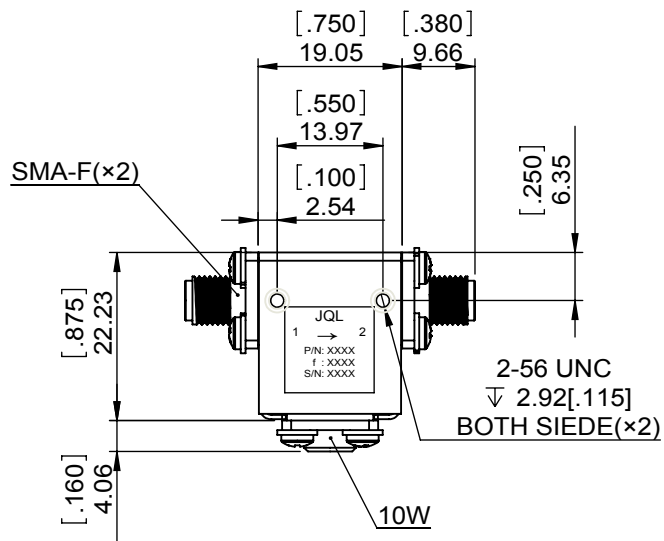

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc		DWG NO: JIC5700T7100S1	
MATERIAL: STEEL		DWG BY: M.Hao 01.08.2014 SACLE	
SURFACE TREATMENT: NICKEL PLATING		CHK'D BY:	
DESCRIPTION: COAXIAL ISOLATOR		APPV'D BY:	
Unit: mm[inch]		Tolerance: Liner: ±0.25 Anguar: ±0.5°	
		The First:	
		1:1	
		A4	