
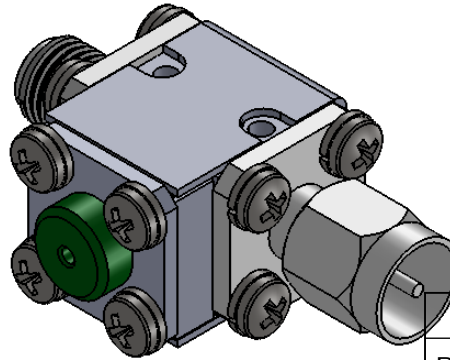




1	2
Document No.	QR4-700-T-003
REV.	A/0

3	4	5	6
REV.	DESCRIPTION	REVISOR	DATE
0		ZC.Wu	05.29.2015
			APPROVED
			David

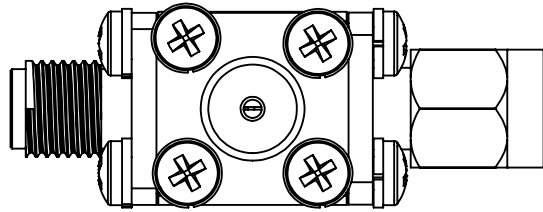

SPECIFICATIONS

Part's Number	JIC8000T8500SFSM0
Frequency(GHz)	8.000~8.500
Direction	-
Insertion Loss(dB)MAX	0.40
Isolation(dB)MIN	21.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	1/1/-
Operating Temperature(°C)	-20~+65
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	1
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

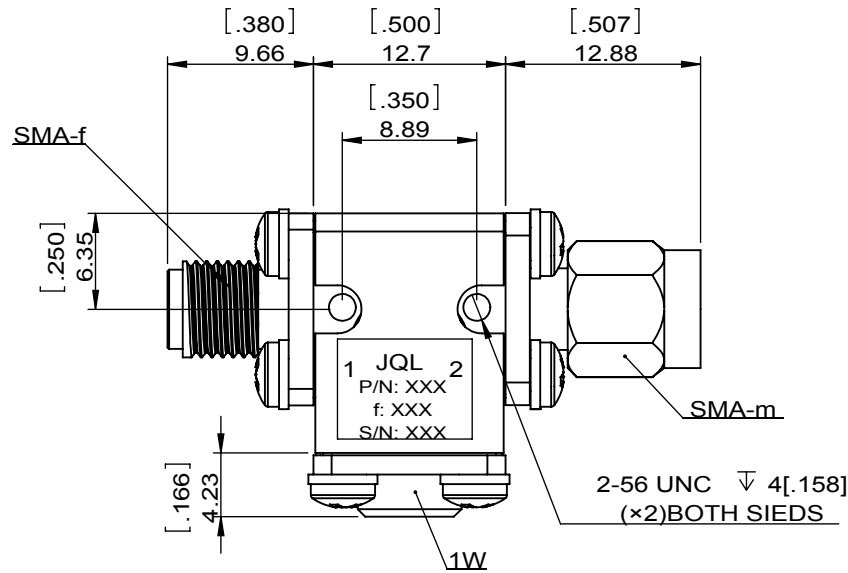

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc	
MATERIAL: STEEL	DWG NO: JIC8000T8500SFSM0
SURFACE TREATMENT: NICKEL PLATING	DWG BY: ZC.Wu 05.29.2015 SCALE
DESCRIPTION: COAXIAL ISOLATOR	CHK'D BY: APPV'D BY: 2:1
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°
	The First:
	A4