
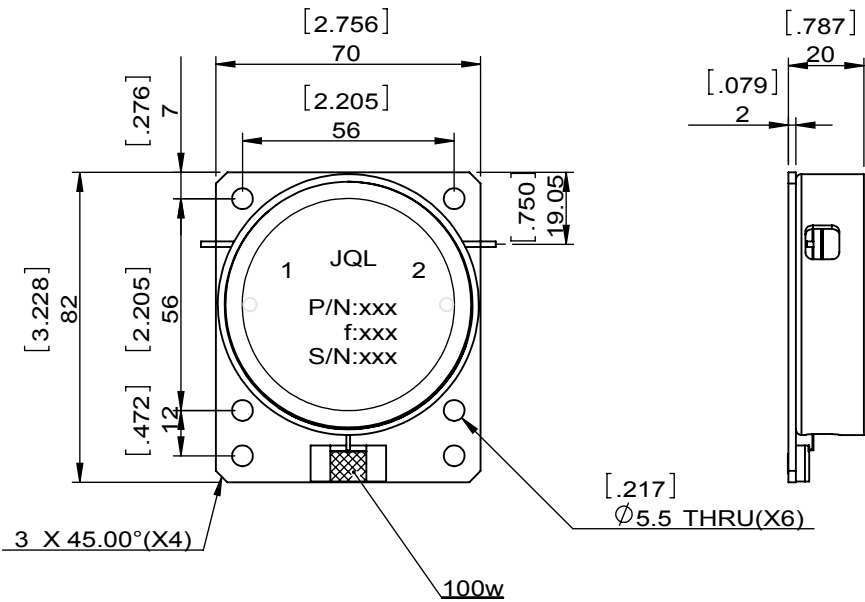


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZC.Wu	02.04.2015	David					

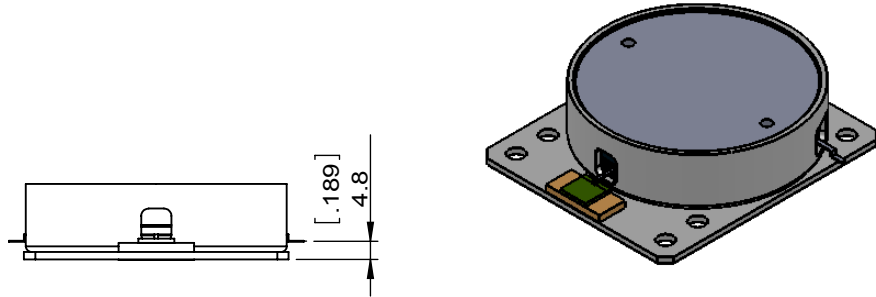

SPECIFICATIONS	
Part's Number	JID0152T0162EM10
Frequency(GHz)	0.152~0.162
Direction	CW
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	19.0
Return Loss(dB)MIN	19.0
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	100/100/-
Operating Temperature(°C)	-20~+85
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	100W
Tab(W×LG×THK)(mm[Inch])	1.5[0.060]×4.0[0.157]×0.25[0.010]
Additional Notes	ACP : Less than -60dB based on input of 48.5dBm Modulation :π/4 shift QPSK,α=0.5,PN9,32ksps Measurement : Δf=25kHz,BW=16kHz-

JQL **JQL Electronic Inc** 3501 Algonquin Road, Ste 230 1(888) 236-9828
Rolling Meadows, IL 60008 (630) 823-2902

MATERIAL: I7082-001	DWG NO: JID0152T0162EM10			
SURFACE TREATMENT: NICKEL PLATING	DWG BY:	ZC.Wu	02.04.2015	SCALE
DESCRIPTION: DROP IN ISOLATOR	CHK'D BY:			1:2
	APP'VD BY:			A4
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.