



1		2		3		4		5		6	
Document No.	QR4-700-T-003			REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
REV.	A/0			0		ZC.Wu	06.29.2015	David			

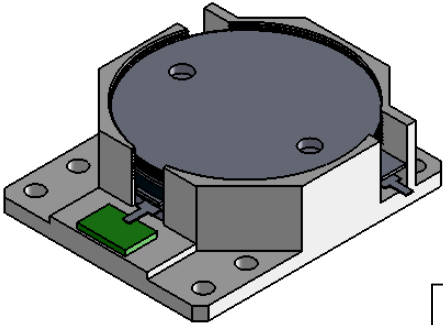

SPECIFICATIONS	
Part's Number	JID0380T0460KM10
Frequency(GHz)	0.380~0.460
Direction	CW
Insertion Loss(dB)MAX	0.40
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	19.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	150/100/
Operating Temperature(°C)	-20~+80
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	100/-
Tab(W×LG×THK)(mm[Inch])	1.30[0.051]x3[0.118]x0.2[0.008]
Additional Notes	-

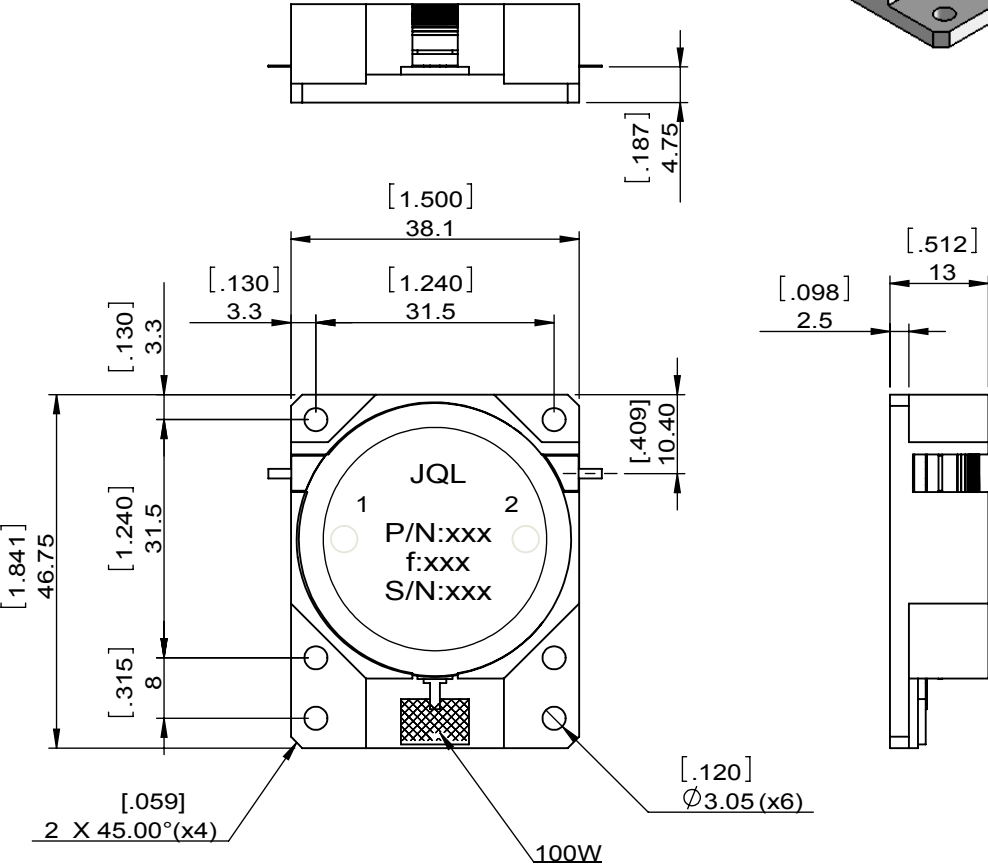

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc

MATERIAL: STEEL	DWG NO: JID0380T0460KM10		
SURFACE TREATMENT: NICKEL PLATING	DWG BY: ZC.Wu	06.29.2015	SCALE
DESCRIPTION: DROP-IN ISOLATOR	CHK'D BY:		1:1
	APPV'D BY:		A4
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: