
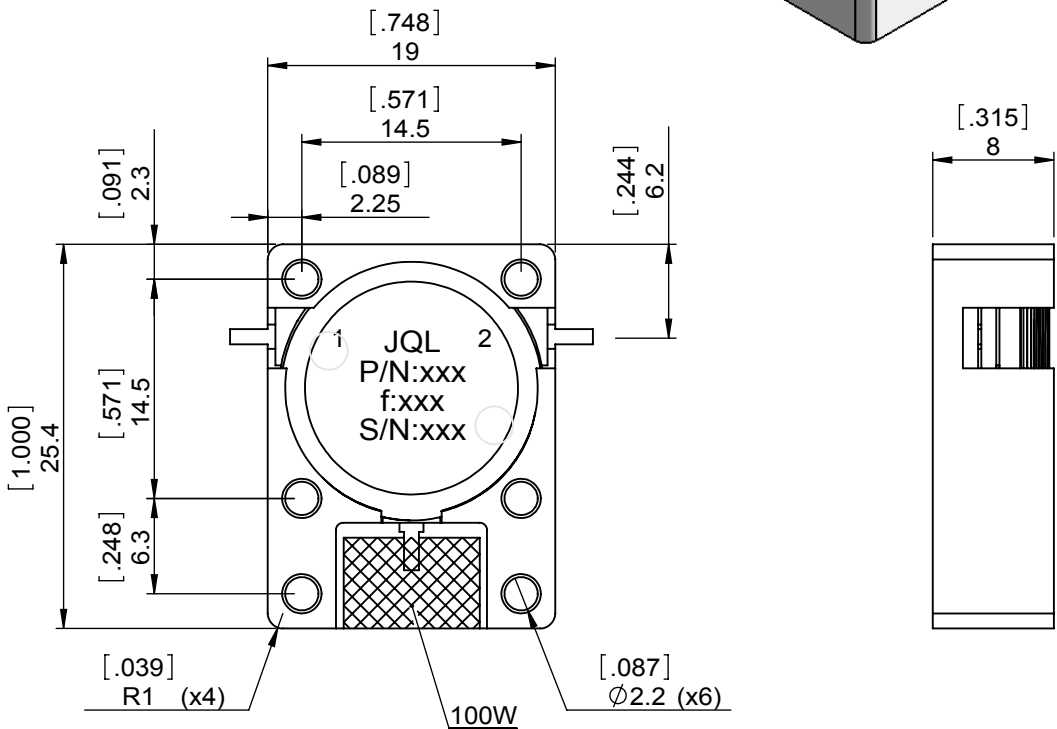


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				M.Hao	03.03.2014	David			

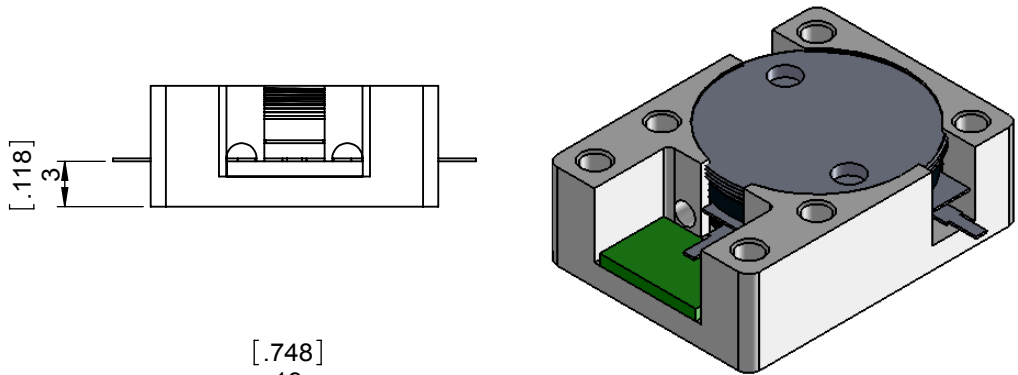

SPECIFICATIONS	
Part's Number	JID0880T0915SM10
Frequency(GHz)	0.880~0.915
Direction	CW
Insertion Loss(dB)MAX	0.35
Isolation(dB)MIN	21.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-70dBc @ 2x50W
Power FWD/REV/PK(Watt)	100/100/-
Operating Temperature($^{\circ}$ C)	-40~+85
Storage Temperature($^{\circ}$ C)	--
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	100
Tab(W \times LG \times THK)(mm[Inch])	1.0[.039] \times 2.0[.079] \times 0.20[.008]
Additional Notes	-

JQL JQL Electronic Inc 500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA Tel: 1(888)236-9828 Fax: 1(888)823-2902

MATERIAL: STEEL	DWG NO: JID0880T0915SM10		
SURFACE TREATMENT: NICKEL PLATING	DWG BY: M.Hao	03.03.2014	SACLE
DESCRIPTION: DROP-IN ISOLATOR	CHK'D BY:		
	APPV'D BY:		2:1
	Unit: mm[inch]	Tolerance: Liner: ± 0.25 Anguar: $\pm 0.5^{\circ}$	The First: A4

RoHS COMPLIANCE This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.