
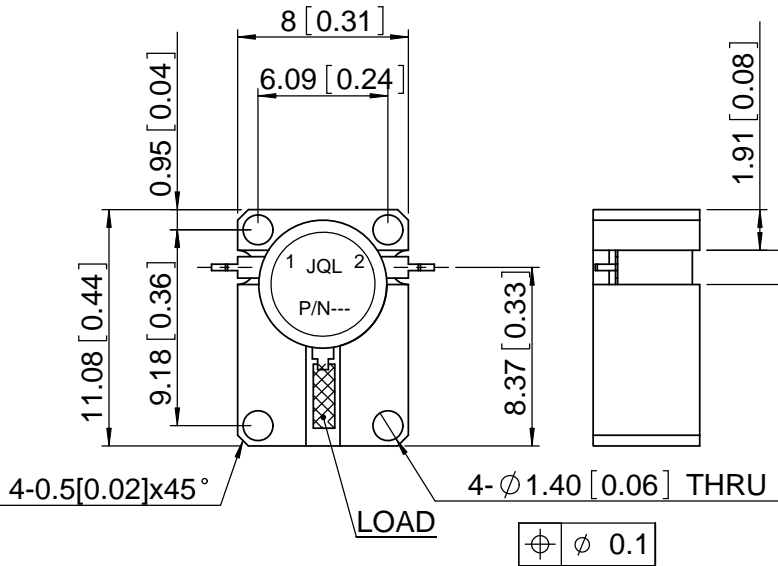
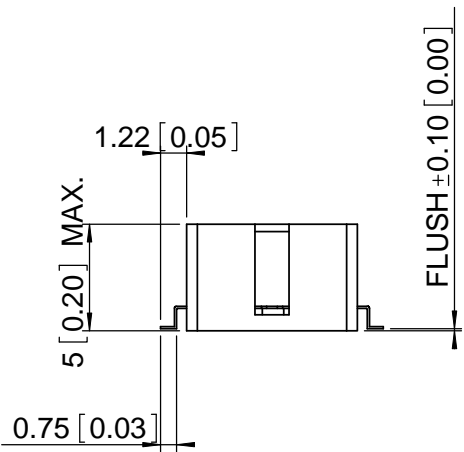


REV.	DESCRIPTION	REVISOR	DATE	APPROVE
0		MH	05.26.12	CH
1	Change the height and surface treatment	MH	10.17.12	CH

SPECIFICATION

Part's Number: JID10K7T11K7QM1L
 Frequency: 10.700~11.700GHz
 Direction: CW
 Insertion Loss: 0.50dB MAX.
 Isolation: 20dB MIN.
 RL: 20dB MIN.
 Average Power FWD: 10W MAX.
 Power REV: 10W MAX.
 Temperature: -30°C~+85°C
 Storage Temp: -45°C~+85°C

TABS:BARSS,SILVER PLATED
 0.3±0.05W X 1.22LG X 0.12±0.03THK.(2)PL



2-R0.80 [0.03]



This document is the property of JQL Electronic Inc.
 It cannot be copied, duplicated, used for manufacturing purposes
 or communicated to third party as a whole or partly,
 without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc

500 Lake Cook Road, Suite 350 Tel : 1(888)236-9828
 Deerfield, IL 60015, USA Fax: 1(630)823-2902

MATERIAL:
STEEL
 SURFACE TREATMENT:
SILVER PLATING
 DESCRIPTION:
DROP-IN CIRCULATOR

DWG NO. JID10K7T11K7QM1L		SCALE: 1:1
DWG BY: MH	DATE: 05.26.12	
CHK'D BY: FW	DATE: 05.26.12	A4
APPVD BY: CH	DATE: 05.26.12	
Unit: mm	TOLERANCE: Liner: ±0.1mm Angular: ±0.5°	Type Of Projection

WEIGHT:

SHEET 1 OF 1