



1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISOR	DATE	APPROVED	
REV.	A/0					0		ZC.Wu	06.01.2015	David	

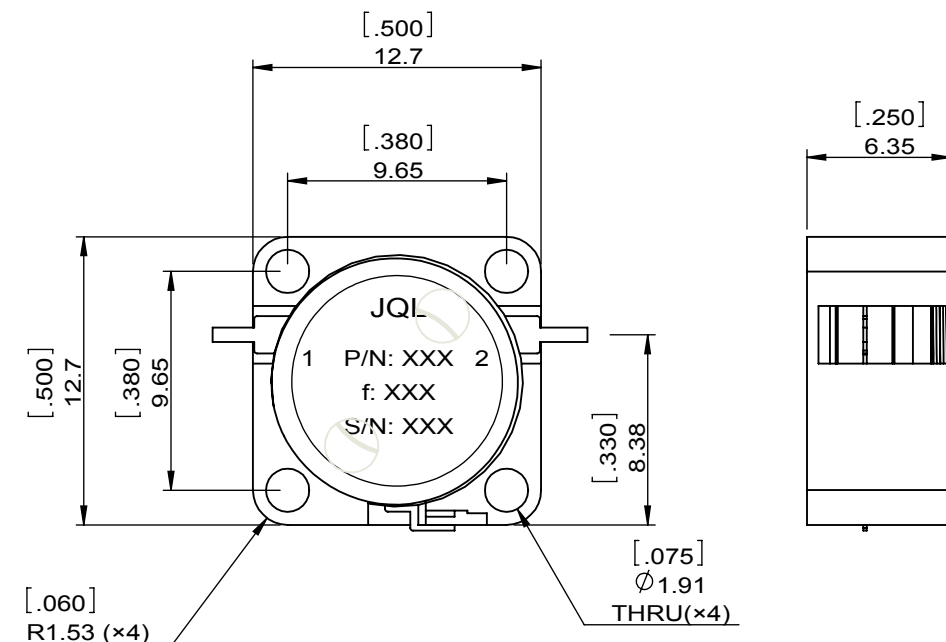

SPECIFICATIONS	
Part's Number	JID12K8T13K1VM1
Frequency(GHz)	12.8305~13.1095
Direction	CW
Insertion Loss(dB)MAX	0.45
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	10/10/-
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	15/-
Tab(W×LG×THK)(mm[Inch])	.635[.03]×2.0[.078]×.13[.005]-
Additional Notes	-

 JQL Electronic Inc												
MATERIAL: STEEL	DWG NO: JID12K8T13K1VM1											
SURFACE TREATMENT: NICKEL PLATING	<table border="1"> <tr> <td>DWG BY:</td> <td>ZC.Wu</td> <td>06.01.2015</td> <td rowspan="2">SCALE</td> </tr> <tr> <td>CHK'D BY:</td> <td></td> <td></td> </tr> </table>	DWG BY:	ZC.Wu	06.01.2015	SCALE	CHK'D BY:						
DWG BY:	ZC.Wu	06.01.2015	SCALE									
CHK'D BY:												
DESCRIPTION: DROP-IN ISOLATOR	<table border="1"> <tr> <td>APPV'D BY:</td> <td></td> <td></td> <td rowspan="2">3:1</td> </tr> <tr> <td>Unit: mm[inch]</td> <td> Tolerance: Liner: ± 0.25 Anquar: $\pm 0.5^\circ$ </td> <td> The First:  </td> </tr> <tr> <td colspan="3"></td> <td>A4</td> </tr> </table>	APPV'D BY:			3:1	Unit: mm[inch]	Tolerance: Liner: ± 0.25 Anquar: $\pm 0.5^\circ$	The First: 				A4
APPV'D BY:			3:1									
Unit: mm[inch]	Tolerance: Liner: ± 0.25 Anquar: $\pm 0.5^\circ$	The First: 										
			A4									

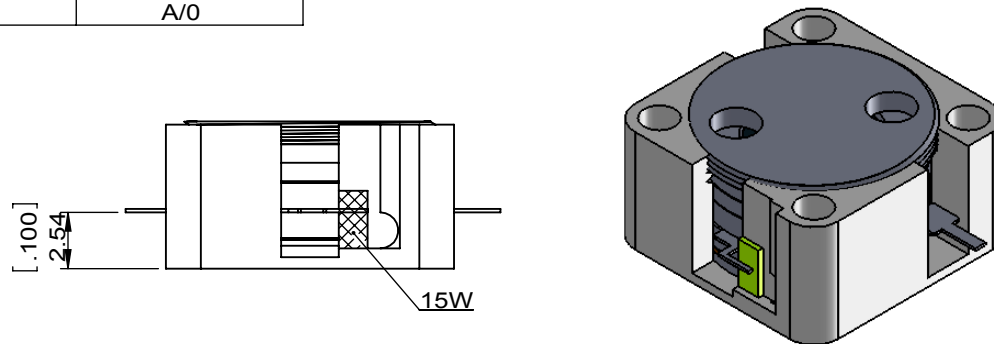

This document is the property of JQL Electronic Inc.
It cannot be copied, duplicated, used for manufacturing purposes
or communicated to third party as a whole or partly,
without the written consent of JQL Electronic Inc.