



1		2		3		4		5		6	
Document No.		QR4-700-T-003		REV.		DESCRIPTION		REVISOR		DATE	
REV.		A/0		0				M.Hao		01.27.2014	
								APPROVED		David	

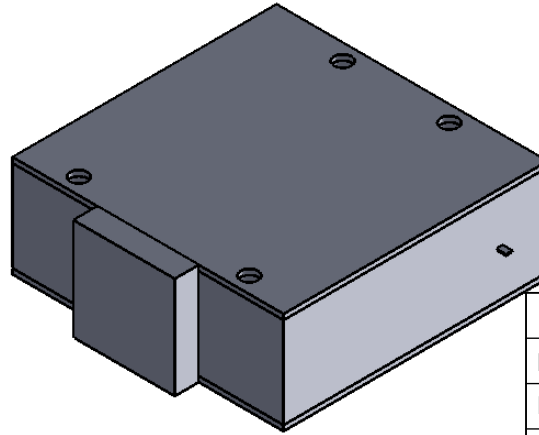

SPECIFICATIONS	
Part's Number	JID1750T4250G0R
Frequency(GHz)	1.750~4.250
Direction	CW
Insertion Loss(dB)MAX	1.0
Isolation(dB)MIN	15.0
Return Loss(dB)MIN	14.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	1/1/-
Operating Temperature(°C)	-10~+60
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	
Tab(W×LG×THK)(mm[Inch])	1.2[.047]×1.8[.071]×0.2[.008]
Additional Notes	-

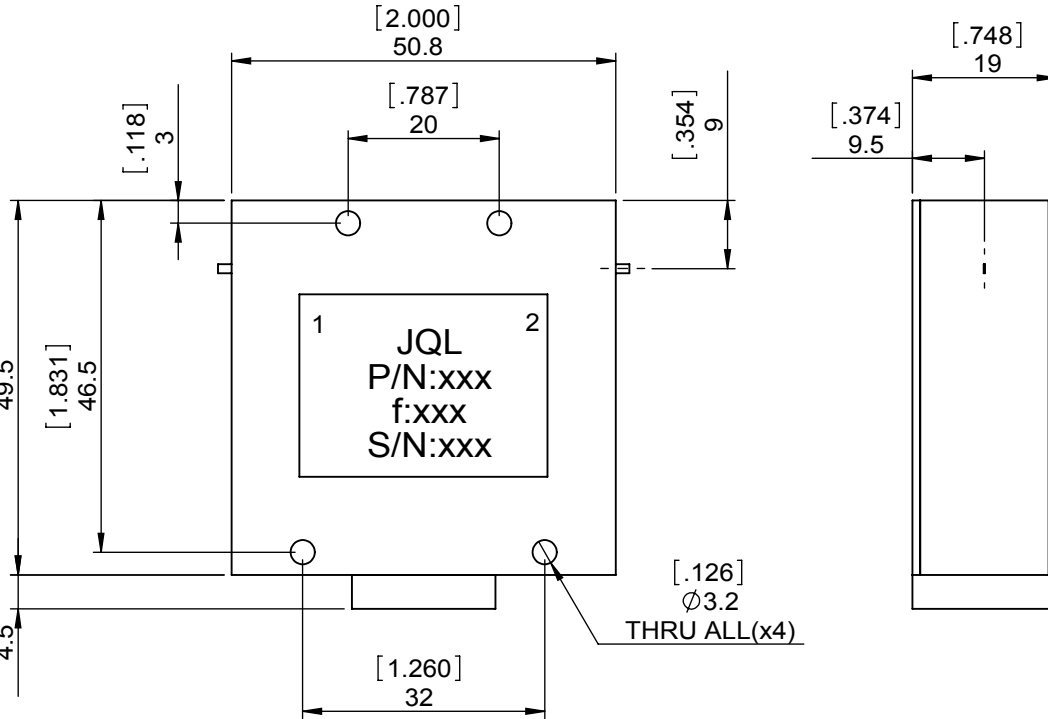

1 JQL 2  
P/N:xxx  
f:xxx  
S/N:xxx



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

**JQL** JQL Electronic Inc 500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA Tel: 1(888)236-9828 Fax: 1(888)823-2902

<b>MATERIAL:</b> STEEL	<b>DWG NO:</b> JID1750T4250G0R			
<b>SURFACE TREATMENT:</b> NICKEL PLATING	DWG BY:	M.Hao	01.27.2014	SACLE
<b>DESCRIPTION:</b> DROP IN ISOLATOR	CHK'D BY:			1:1
	APPV'D BY:			
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	